PHILIPS

Sleek Surface PRO

9209828



BOLD and Elegant

The Sleek SurfacePro family of downlights with bold and elegant metal delivers perfect balance of good design with high energy efficiency. It is a perfect solution for retail application and general indoor area lighting . The range brings together high-flux lighting with a homogeneous optical system without making any concessions on energy efficiency design

Benefits

- Optimized lighting for retail and office space: smooth and comfortable
- Stylish and Rugged metal esthetics to cater to different open ceiling application
- Wide range of lumen packs & CCT make it suitable for most indoor applications
- Professional specification with long life

Applications

- Retail Shops
- Modern office corridors
- Institutions
- Community Centers
- Reception Areas
- Government Buildings

Features

- Superior efficacy of 110 lm/W
- Uniform & volumetric light distribution
- Comfortable Light - CRI of 80 to ensure better color rendering.
- Lifetime: 30,000 Hrs. @ Ta45^{0}C, BIS Approbation - Safe and Reliable performance
- THD<10% - Higher power factor, lower peak currents, and higher efficiency.
- Multiple Lumen Packs & CCT - For different office applications and mounting heights
- Meant for Indoor Application Only. Should not be used in outdoor environment.

Versions



Sleek SurfacePro 5"

Dimensional drawing

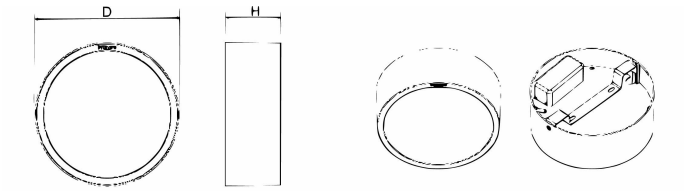

Type	Lumen Pack (lm)	Dimensions D x H (mm)	Voltage	Frequency	Kg
SM295C	600, 1000	Ø130 x 60	220-240V~	50Hz	0.45
SM296C	1200, 1500	Ø153 x 60	220-240V~	50Hz	0.55
SM296C	2000	Ø153 x 60	220-240V~	50Hz	0.40

Sleek SurfacePro

General Information

Driver included	Yes

Light Technical

Color rendering index (CRI)	>80
Beam angle of light source	- degree(s)
Optic type	-

Operating and Electrical

Input Voltage	220 to 240 V
Protection class IEC	Safety class I

Controls and Dimming

Dimmable	No

Mechanical and Housing

Housing Color	Aluminum and gray
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Optical cover type	Opal diffuser in polycarbonate cover

Approval and Application

Flammability mark	For mounting on normally flammable surfaces
Ambient temperature range	0 to +45 °C

Initial Performance (IEC Compliant)

Initial chromaticity	<5

Light Technical

Order Code	Full Product Name	Luminous Flux	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)
919515814689	SM295C LED6S-3000 PSU WH	700 lm	3000 K	115 lm/W
919515814690	SM295C LED6S-4000 PSU WH	700 lm	4000 K	115 lm/W
919515814691	SM295C LED6S-6500 PSU WH	700 lm	6500 K	115 lm/W
919515814692	SM295C LED10S-3000 PSU WH	1,000 lm	3000 K	110 lm/W
919515814693	SM295C LED10S-4000 PSU WH	1,000 lm	4000 K	110 lm/W
919515814694	SM295C LED10S-6500 PSU WH	1,000 lm	6500 K	110 lm/W
919515814695	SM296C LED12S-3000 PSU WH	1,200 lm	3000 K	110 lm/W
919515814696	SM296C LED12S-4000 PSU WH	1,200 lm	4000 K	110 lm/W
919515814697	SM296C LED12S-6500 PSU WH	1,200 lm	6500 K	110 lm/W
919515814698	SM296C LED15S-3000 PSU WH	1,500 lm	3000 K	110 lm/W
919515814699	SM296C LED15S-4000 PSU WH	1,500 lm	4000 K	110 lm/W
919515814701	SM296C LED15S-6500 PSU WH	1,500 lm	6500 K	110 lm/W
919515814702	SM296C LED20S-3000 PSU WH	2,000 lm	3000 K	110 lm/W
919515814703	SM296C LED20S-4000 PSU WH	2,000 lm	4000 K	110 lm/W
919515814704	SM296C LED20S-6500 PSU WH	2,000 lm	6500 K	110 lm/W

Operating and Electrical

Order Code	Full Product Name	Power Consumption
919515814689	SM295C LED6S-3000 PSU WH	6 W
919515814690	SM295C LED6S-4000 PSU WH	6 W
919515814691	SM295C LED6S-6500 PSU WH	6 W
919515814692	SM295C LED10S-3000 PSU WH	9 W
919515814693	SM295C LED10S-4000 PSU WH	9 W
919515814694	SM295C LED10S-6500 PSU WH	9 W
919515814695	SM296C LED12S-3000 PSU WH	11 W
919515814696	SM296C LED12S-4000 PSU WH	11 W
919515814697	SM296C LED12S-6500 PSU WH	11 W
919515814698	SM296C LED15S-3000 PSU WH	13.5 W
919515814699	SM296C LED15S-4000 PSU WH	13.5 W

Order Code	Full Product Name	Power Consumption
919515814701	SM296C LED15S-6500 PSU WH	13.5 W
919515814702	SM296C LED20S-3000 PSU WH	18 W
919515814703	SM296C LED20S-4000 PSU WH	18 W
919515814704	SM296C LED20S-6500 PSU WH	18 W

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.