PHILIPS

MSR

XDMSRP



MSR – bright vivid colors, always

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Benefits

- Optimal light collection
- Excellent color characteristics
- Brightness on stage

Applications

- Theatre stages
- Discos
- Events
- Shows

Data subject to change

Features

- Single ended lamp concept
- High CRI
- Daylight Color Temperatures

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Versions



XPPR_XDMSR_0018-Product photo



XPPR XDMSR 0025

Dimensional drawing

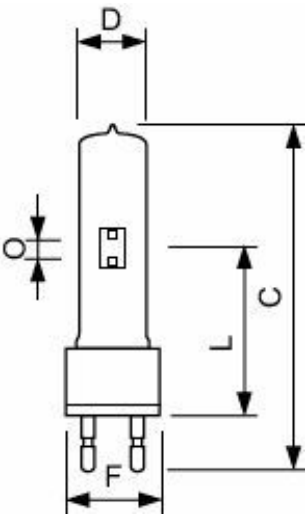

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 1200 1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm
MSR 1200/2.1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm
MSR 700 1CT/8	30 mm	8.0 mm	74 mm	76 mm	75 mm	152 mm	42 mm
MSR 700/2 1CT/8	30 mm	8.0 mm	74 mm	76 mm	75 mm	152 mm	42 mm

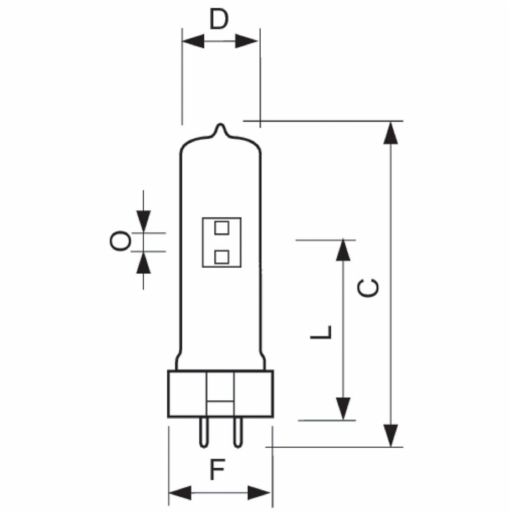

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 575/2 10H 1CT/4	30 mm	7.0 mm	64 mm	66 mm	65 mm	125 mm	36 mm	35 mm	34 mm

General Information

Operating Position	UNIVERSAL [Any or Universal (U)]

Controls and Dimming

Dimmable	No

General Information

Order Code	Full Product Name	Cap-Base
928078005114	MSR 700 1CT/8	G22
928078105114	MSR 1200 1CT/3	G22
928171505114	MSR 700/2 1CT/8	G22
928171805114	MSR 1200/2.1CT/3	G22
928171605115	MSR 575/2 10H 1CT/4	GX9.5

Light Technical

Order Code	Full Product Name	Color Code	Luminous Flux	Correlated Color Temperature (Nom)	Color rendering index (CRI)
928078005114	MSR 700 1CT/8	-	55,000 lm	5900 K	75
928078105114	MSR 1200 1CT/3	-	103,000 lm	5900 K	80
928171505114	MSR 700/2 1CT/8	2	55,000 lm	7200 K	80
928171805114	MSR 1200/2.1CT/3	2	104,000 lm	7200 K	85
928171605115	MSR 575/2 10H 1CT/4	2	47,000 lm	6990 K	73

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Lamp Current (Nom)
928078005114	MSR 700 1CT/8	700 W	12 A
928078105114	MSR 1200 1CT/3	1,200 W	13.8 A
928171505114	MSR 700/2 1CT/8	700 W	11 A
928171805114	MSR 1200/2.1CT/3	1,200 W	13.8 A
928171605115	MSR 575/2 10H 1CT/4	575 W	6.75 A

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.