Signify

CitySoul gen2 LED Mini

BGP530



CitySoul LED gen2 mini: a versatile identity

CitySoul LED gen2 is one of our most versatile and iconic luminaires, designed to bring elegance, efficiency, and ambience to every cityscape. Its rounded, minimalist form with seamless bracket transitions creates a coherent identity across residential areas, main roads, and vibrant city centers. This modular family offers multiple sizes, mounting, and bracket options—giving lighting designers the flexibility to adapt to any urban environment without compromising on aesthetics. Powered by our proven LEDGINE-O platform and now enhanced with the innovative LEDGINE-P for even higher efficacy, CitySoul LED gen2 delivers the right light, exactly where it's needed. Application-specific optics ensure safety, comfort, and reduced energy use, while dedicated light recipes preserve dark skies and support healthier ecosystems. With one or two System Ready (SR) sockets, CitySoul LED gen2 is fully prepared for connected lighting and advanced control platforms such as Interact, helping municipalities unlock further energy savings, operational insights, and long-term sustainability.

Benefits

- One coherent, integrated design concept for luminaires, brackets and poles
- The latest LEDGINE-P platform delivers even higher efficacy, enabling municipalities to significantly reduce operating costs
- Future-proof thanks to SR socket compatible with standard and advanced lighting controls
- Preserves natural darkness and protects night-time environments
- Service tag for easy installation and maintenance

Applications

- City centers
- Parks and plazas
- Roads and streets
- Commercial districts

Features

- Compatible with existing CitySoul pole and bracket ranges
- A broad range of elegant, dedicated and complete sets, including poles and brackets, a tiltable option, double post-top and catenary versions
- Efficacy up the 180 lm/W (depending on configuration)
- Protecting dark skies with ClearStar and warm, DarkSky-approved CCTs (1800–2200K, 2700K, 3000K), excluding rotatable mounting options (PA, SJ, P, W)
- Easy maintenance on site

Versions



Right Curve-JSP532-SPP.jpg



CitySoul LED gen2 mini post-top



CitySoul LED gen2 mini with Lyre bracket



CitySoul LED gen2 mini side entry



BGP530



CitySoul LED gen2 mini suspended

Dimensional drawing

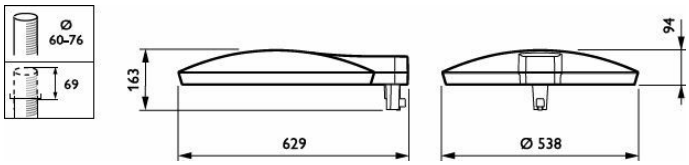

CitySoul gen2 Mini - LED module 6000 lm - 830 warm white - Power supply unit with DALI interface - Safety class II - Distribution medium 50 - Clear glass - Gray - Philips standard surge protection level - - - Post-top for diameter 60 mm

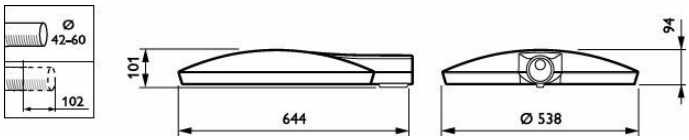

BRP530 LED60-1P/830 II DW52P D9 ALGR 60S

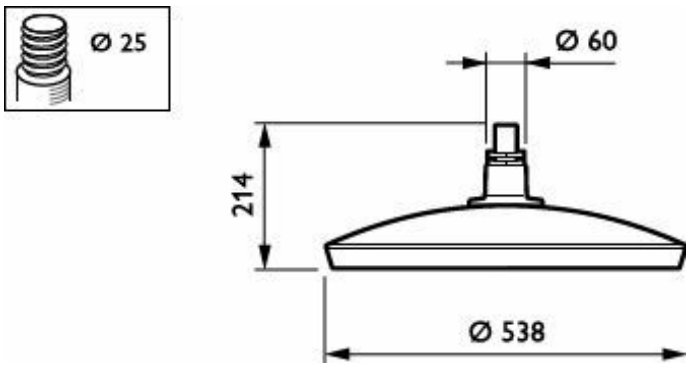

BSP530 LED60-1P/830 II DW52P D9 AL GR

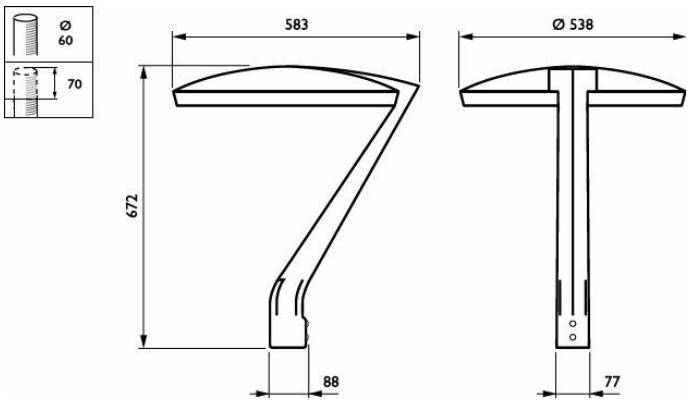

CitySoul gen2 LYRE - LED module 6000 lm - 830 warm white - Power supply unit with DALI interface - Safety class II - Distribution medium 50 - Clear glass - Gray - Luminaire surge protection level until 10 kV differential mode and 10 kV common mode - - - -

Product details



OPDP_BGP530i_0005-Detail photo



OPDP_BGP530i_0007-Detail photo



OPDP_BGP530i_0009-Detail photo



OPDP_BGP530i_0015-Detail photo

General Information

Lamp family code	LED60 [LED module 6000 lm]
Light source replaceable	Yes
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes

Light Technical

Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	80
Number of light sources	30
Light source color	830 warm white

Controls and Dimming

Dimmable	Yes
Maximum dim level	10%

Mechanical and Housing

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Standard tilt angle posttop	-
Standard tilt angle side entry	-

Approval and Application

Flammability mark	-
CE mark	Yes

Light Technical

Order Code	Full Product Name	Upward light output ratio	Luminous Flux	Luminaire light beam spread	Optic type outdoor
912300060814	BVP530 LED60-1P/830 II DW52P D9 AL GR	0.01	4,980 lm	-	Distribution wide 52
912300024408	BPP530 LED60-4S/830 II DM50 D9 AL GR	0.03	5,100 lm	-	Distribution medium 50
912300060809	BPP530 LED60-1P/830 II DW52P D9 AL GR	0.01	4,980 lm	-	Distribution wide 52
912300024530	BPP532 LED60-4S/830 II DM50 D9 SRG10ALGR	0.03	4,920 lm	-	Distribution medium 50
912300060810	BPP532 LED60-1P/830 II DW52P D9 AL GR	0.01	4,980 lm	-	Distribution wide 52

Order Code	Full Product Name	Upward light output ratio	Luminous Flux	Luminaire light beam spread	Optic type outdoor
912300024531	BRP530 LED60-4S/830 II DM50 D9 SRG10ALGR	0.03	5,100 lm	-	Distribution medium 50
912300060811	BRP530 LED60-1P/830 II DW52P D9 ALGR 60S	0.01	4,980 lm	-	Distribution wide 52
912300024534	BGP530 LED60-4S/830 II DM50 D9 SRG10 AL	0.03	5,100 lm	-	Distribution medium 50
912300060812	BGP530 LED60-1P/830 II DW52P D9 AL GR CD	0.01	4,980 lm	-	Distribution wide 52
912300060103	BSP530 LED60-4S/830 II DM50 D9 SRG10 AL	0.01	5,100 lm	30° - 5° x 153°	Distribution medium 50
912300060813	BSP530 LED60-1P/830 II DW52P D9 AL GR	0.01	4,980 lm	-	Distribution wide 52

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Surge Protection (Common/Differential)
912300060814	BVP530 LED60-1P/830 II DW52P D9 AL GR	34 W	Standard surge protection level
912300024408	BPP530 LED60-4S/830 II DM50 D9 AL GR	46.5 W	Standard surge protection level
912300060809	BPP530 LED60-1P/830 II DW52P D9 AL GR	34 W	Standard surge protection level
912300024530	BPP532 LED60-4S/830 II DM50 D9 SRG10ALGR	46.5 W	Surge protection level until 10 kV differential mode and 10 kV common mode
912300060810	BPP532 LED60-1P/830 II DW52P D9 AL GR	34 W	Standard surge protection level
912300024531	BRP530 LED60-4S/830 II DM50 D9 SRG10ALGR	46.5 W	Surge protection level until 10 kV differential mode and 10 kV common mode
912300060811	BRP530 LED60-1P/830 II DW52P D9 ALGR 60S	34 W	Standard surge protection level
912300024534	BGP530 LED60-4S/830 II DM50 D9 SRG10 AL	46.5 W	Surge protection level until 10 kV differential mode and 10 kV common mode
912300060812	BGP530 LED60-1P/830 II DW52P D9 AL GR CD	34 W	Standard surge protection level
912300060103	BSP530 LED60-4S/830 II DM50 D9 SRG10 AL	46.5 W	Surge protection level until 10 kV differential mode and 10 kV common mode
912300060813	BSP530 LED60-1P/830 II DW52P D9 AL GR	34 W	Standard surge protection level

Mechanical and Housing

Order Code	Full Product Name	Housing Color	Optical cover type
912300060814	BVP530 LED60-1P/830 II DW52P D9 AL GR	Grey	Flat glass
912300024408	BPP530 LED60-4S/830 II DM50 D9 AL GR	Gray	Clear glass
912300060809	BPP530 LED60-1P/830 II DW52P D9 AL GR	Grey	Flat glass
912300024530	BPP532 LED60-4S/830 II DM50 D9 SRG10ALGR	Gray	Flat glass
912300060810	BPP532 LED60-1P/830 II DW52P D9 AL GR	Grey	Flat glass
912300024531	BRP530 LED60-4S/830 II DM50 D9 SRG10ALGR	Gray	Flat glass
912300060811	BRP530 LED60-1P/830 II DW52P D9 ALGR 60S	Grey	Flat glass

Order Code	Full Product Name	Housing Color	Optical cover type
912300024534	BGP530 LED60-4S/830 II DM50 D9 SRG10 AL	Gray	Clear glass
912300060812	BGP530 LED60-1P/830 II DW52P D9 AL GR CD	Grey	Flat glass
912300060103	BSP530 LED60-4S/830 II DM50 D9 SRG10 AL	Grey	Flat glass
912300060813	BSP530 LED60-1P/830 II DW52P D9 AL GR	Grey	Flat glass

Product Data

Order Code	Full Product Name	Product family code
912300060814	BVP530 LED60-1P/830 II DW52P D9 AL GR	BVP530
912300024408	BPP530 LED60-4S/830 II DM50 D9 AL GR	BPP530
912300060809	BPP530 LED60-1P/830 II DW52P D9 AL GR	BPP530
912300024530	BPP532 LED60-4S/830 II DM50 D9 SRG10ALGR	BPP532
912300060810	BPP532 LED60-1P/830 II DW52P D9 AL GR	BPP532
912300024531	BRP530 LED60-4S/830 II DM50 D9 SRG10ALGR	BRP530
912300060811	BRP530 LED60-1P/830 II DW52P D9 ALGR 60S	BRP530
912300024534	BGP530 LED60-4S/830 II DM50 D9 SRG10 AL	BGP530
912300060812	BGP530 LED60-1P/830 II DW52P D9 AL GR CD	BGP530
912300060103	BSP530 LED60-4S/830 II DM50 D9 SRG10 AL	BSP530
912300060813	BSP530 LED60-1P/830 II DW52P D9 AL GR	BSP530

Polar normal diagrams

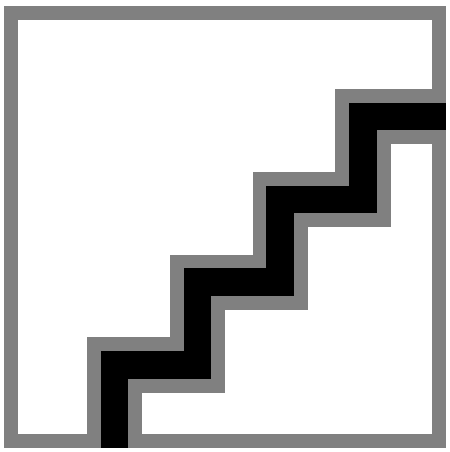

BPP530 LED60-4S/830 II DM50 D9 AL GR 912300024408

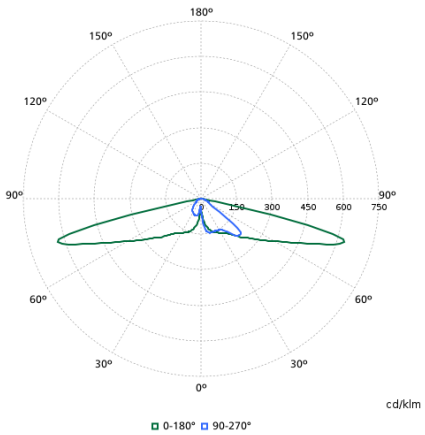

BPP532 LED60-4S/830 II DM50 D9 SRG10ALGR 912300024530

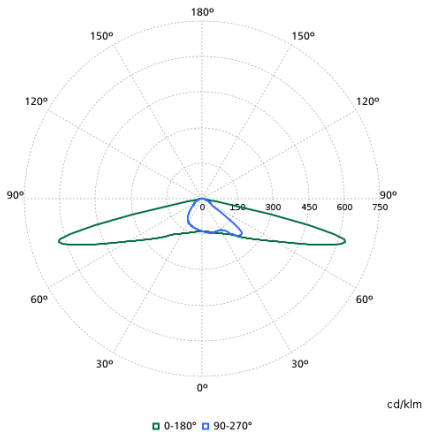

BRP530 LED60-4S/830 II DM50 D9 SRG10ALGR 912300024531

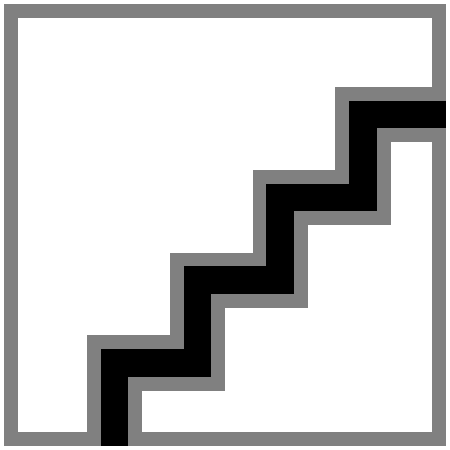

BGP530 LED60-4S/830 II DM50 D9 SRG10 AL 912300024534

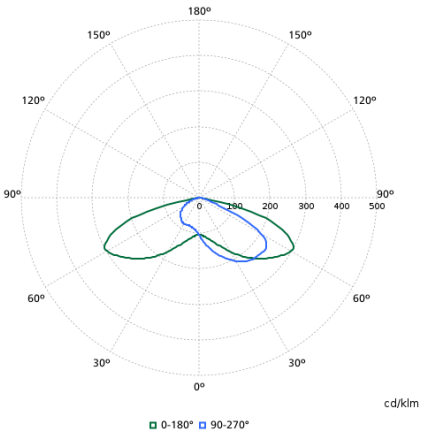

BSP530 LED60-1P/830 II DW52P D9 AL GR 912300060813

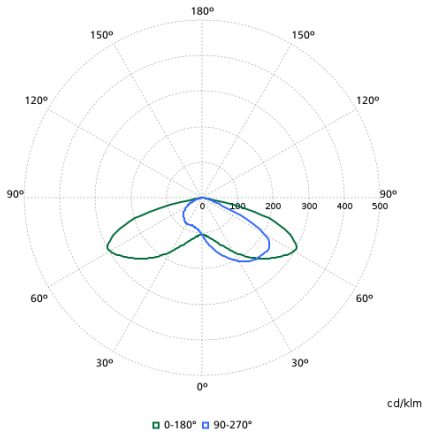

BVP530 LED60-1P/830 II DW52P D9 AL GR 912300060814

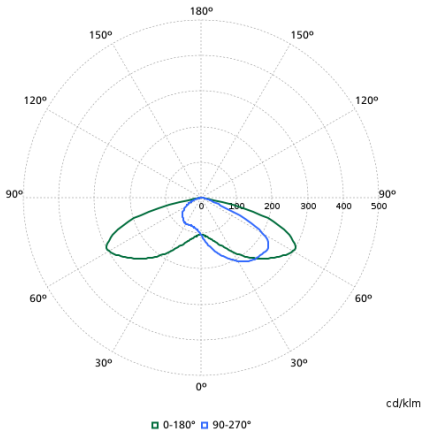

BPP530 LED60-1P/830 II DW52P D9 AL GR 912300060809

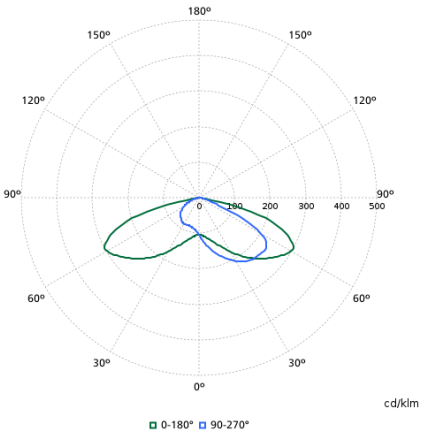

BGP530 LED60-1P/830 II DW52P D9 AL GR CD 912300060812

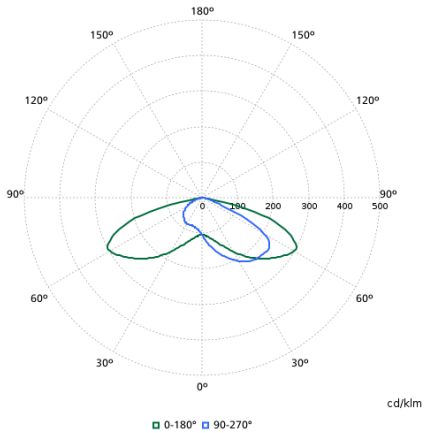

BRP530 LED60-1P/830 II DW52P D9 ALGR 60S 912300060811

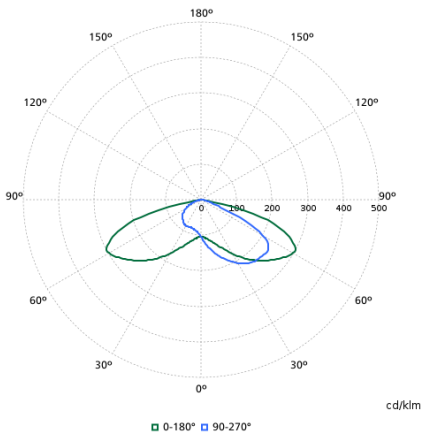

BPP532 LED60-1P/830 II DW52P D9 AL GR 912300060810

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.