PHILIPS

## MSR Platinum (Touring/ Stage)

XDMSRPLA



# MSR Platinum 35 – enhanced stage lighting

Today’s stage designs call for lighting solutions which deliver high brightness and high-contrast beams to avoid shadow creation, as well as more compact luminaire and fixture designs to improve creative choice and design flexibility. Addressing this need, we have developed an incredibly powerful, brilliant and lightweight, compact system for the most amazing light experience – MSR Platinum 35. This lamp system provides a powerful and innovative tool to create intense lighting and delivers the same good light quality as other MSR lamps. The exceptionally short arc generates sparkling, bright light and this ultra-compact design makes the lamp suitable for smaller stage lighting fixtures.

### Benefits

- High beam intensity, high brightness
- Freedom to create smaller and lighter fixtures
- High perceived brightness
- Easy and fast lamp replacement
- A long and reliable lifetime

### Applications

- Events
- Shows/Theater
- Touring/Stage

## Features

- Very short arc
- Compact system
- High Correlated color temperature
- Philips FastFit technology
- Philips Platinum technology
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Versions



XPPR_XDMSR_0014-Product photo

## Dimensional drawing

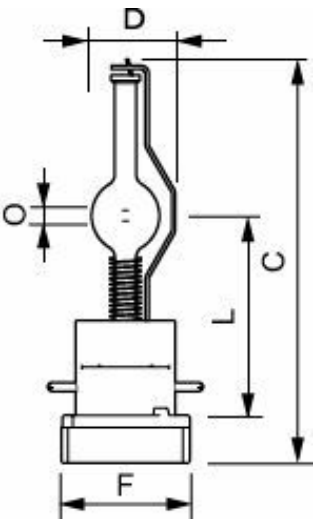


| Product | D (max) | O | L (min) | L (max) | L | C (max) |
|---|---|---|---|---|---|---|
| MSR Platinum 35 1CT | 23.5 mm | 3.0 mm | 55 mm | 57 mm | 56 mm | 116 mm |

### General Information

| | |
|---|---|
| Cap-Base | PGJX36 |
| Operating Position | UNIVERSAL [Any or Universal (U)] |

### Light Technical

| | |
|---|---|
| Color Code | 2 |
| Luminous Flux | 53,300 lm |
| Correlated Color Temperature (Nom) | 8500 K |
| Color rendering index (CRI) | 73 |

## Operating and Electrical

| | |
|---|---|
| Power Consumption | 773 W |
| Lamp Current (Nom) | 12.0 A |

## Controls and Dimming

| | |
|---|---|
| Dimmable | Yes |

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.