PHILIPS

UV-A(-1) PL-L

XPUVAPL



UVA PL-L - the compact alternative to UVA TL

Philips offers highly reliable PL-L lamps emitting UV-A in a spectral distribution wavelength of between 315 to 380 nm. This makes these lamps suitable for various applications such as phototherapy, curing, Insect trap and Photocatalytic oxidation

Benefits

- Optimal spectrum for various applications

Applications

- Phototherapy
- Curing
- Insect Trap
- Photocatalytic Oxidation

Features

- Emission peak at 350 nm
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.

Versions



XPPR_XURPLL_0001-Product photo

Dimensional drawing

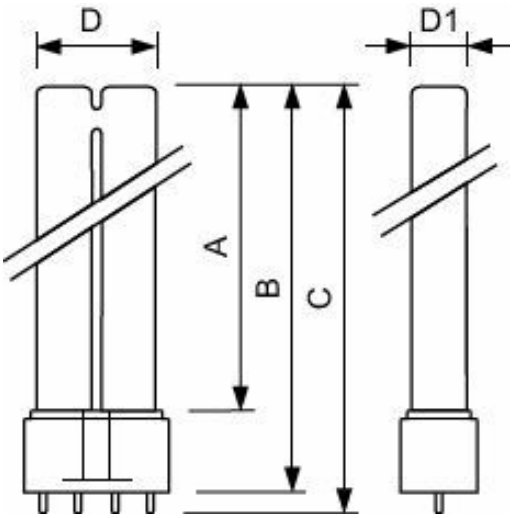

Product	D1 (max)	D (max)	C1	A (max)	B (max)	C (max)
PL-L 36W/09/4P	18 mm	39 mm	20.0 mm	384.2 mm	410 mm	416.6 mm
PL-L 36W/09/4P 1CT/25	18 mm	39 mm	20.0 mm	384.2 mm	410 mm	416.6 mm

General Information

Cap-Base	2G11

Light Technical

Color Code	09
Color Designation	Ultra Violet A

Operating and Electrical

Power Consumption	36 W
Lamp Current (Nom)	0.435 A

Mechanical and Housing

Bulb Shape	2xT16

Approval and Application

Mercury (Hg) Content (Max)	4.9 mg
Mercury (Hg) Content (Nom)	4.4 mg

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.