PHILIPS

MASTERColour CDM-Tm Elite Mini

DCDMTME



Perfect sparkle, mini design

Mini, single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering

Benefits

- High-intensity beam of crisp white sparkling light makes merchandise look irresistible
- Lowest Total Cost of Ownership as a result of high efficacy (same light, less energy or same energy, more light) and long life
- Fits in small luminaires which are less visible

Applications

- Accent and display lighting in retail
- General and decorative indoor lighting
- Outdoor area lighting

Features

- Crisp white sparkling light
- Excellent color rendering, with extra red
- High efficacy with unparalleled lumen maintenance
- Stable color performance over lifetime
- Mini size

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- For 50W use with Philips electronic gear only

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Versions



LPPR CDM-Tm 0001

Dimensional drawing

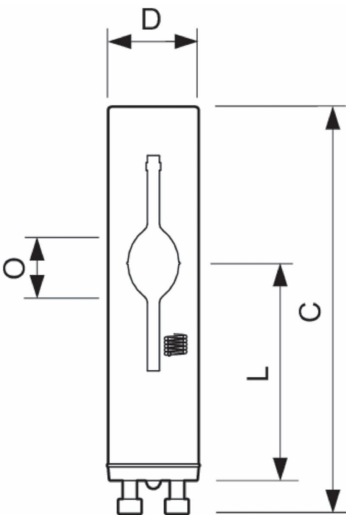

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MC CDM-Tm Elite Mini 20W/830 GU6.5 1CT	13.3 mm	0.5 inch	3.4 mm	28 mm	32 mm	30 mm	56.7 mm
MC CDM-Tm Elite Mini 35W/930 GU6.5 1CT	13.3 mm	0.5 inch	4.7 mm	28 mm	32 mm	30 mm	56.7 mm

General Information

Cap-Base	GU6.5
Operating Position	UNIVERSAL [Any or Universal (U)]

Light Technical

Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.434
Chromaticity Coordinate Y (Nom)	0.398
Correlated Color Temperature (Nom)	3000 K

Controls and Dimming

Dimmable	No

Mechanical and Housing

Bulb Finish	Clear

Light Technical

Order Code	Full Product Name	Luminous Flux	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)
928183505130	MC CDM-Tm Elite Mini 20W/830 GU6.5 1CT	1,800 lm	90 lm/W	84
928187405130	MC CDM-Tm Elite Mini 35W/930 GU6.5 1CT	3,950 lm	102 lm/W	90

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Voltage (Nom)
928183505130	MC CDM-Tm Elite Mini 20W/830 GU6.5 1CT	20.1 W	95 V
928187405130	MC CDM-Tm Elite Mini 35W/930 GU6.5 1CT	39.1 W	87 V

Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
928183505130	MC CDM-Tm Elite Mini 20W/830 GU6.5 1CT	T-4
928187405130	MC CDM-Tm Elite Mini 35W/930 GU6.5 1CT	T13.3

Approval and Application

Order Code	Full Product Name	Mercury (Hg) Content (Max)	Mercury (Hg) Content (Nom)	Energy Consumption kWh/ 1000 h
928183505130	MC CDM-Tm Elite Mini 20W/830 GU6.5 1CT	3.5 mg	3.5 mg	21 kWh
928187405130	MC CDM-Tm Elite Mini 35W/930 GU6.5 1CT	4.7 mg	4.7 mg	40 kWh

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.