PHILIPS

MASTER Actinic BL TL-D

XUVATLD



MASTER Actinic BL TL-D(-K) - the most effective way to eliminate insects

The Philips MASTER Actinic BL TL-D(-K) family is an ideal choice for insect traps. These lamps have the perfect spectrum for attracting insects. Also, they have virtually no UV-B output, and so are perfectly safe. Furthermore, they have the special "MASTER" coating to improve the efficiency, initial UV-A output and maintenance of the lamp. What's more, with the lowest mercury content in the industry and being 100% lead-free, combined with their high efficiency, these lamps represent the best choice for the environment. Optionally, for extra safety you can apply a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements.

Benefits

- Perfectly matches the eye sensitivity of houseflies and in this way attracts more insects
- Safe for use
- Good environmental choice
- High UV-A output during entire season

Applications

- Insect traps, Electronic Fly Killers (EFKs)

Features

- Emits long-wave UV-A radiation in the 350-400nm range
- UV-B/UV-A ratio less than 0.1 % (UV-B 280-315nm)
- 100% lead-free

- Low mercury content
- Special maintenance coating
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Versions



XPPR XUBTLD 0001

Dimensional drawing

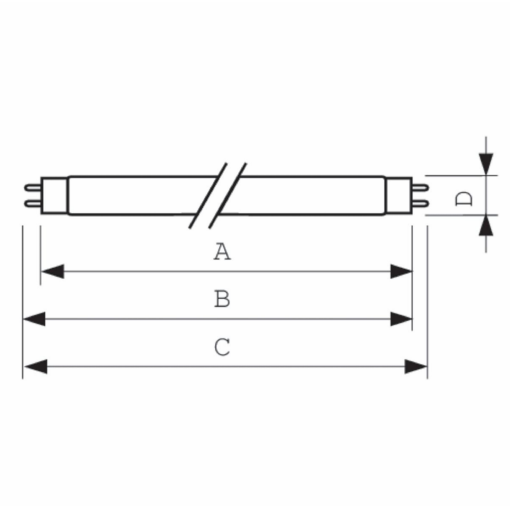

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER Actinic BL TL-D 18W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]

Light Technical

Color Code	10
Color Designation	Actinic

Mechanical and Housing

Bulb Shape	T26

Approval and Application

Mercury (Hg) Content (Nom)	3.0 mg

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Lamp Current (Nom)
928022601003	MASTER Actinic BL TL-D 15W/10 1SL/25	15.9 W	0.335 A
928044601003	MASTER Actinic BL TL-D 18W/10 1SL/25	18 W	0.36 A

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.