PHILIPS

GreenSpace Evo Mini Cylinder

SA332C



A small and sustainable surface mounted cylinder in a sleek, subtle design

GreenSpace Evo Mini Cylinder is a sustainable lighting fixture that comes with a sleek and subtle design. This makes the Cylinder an ideal choice for hospitality and fashion retail applications. The 3D printed housing is crafted from at least 65% recycled or bio-circular materials, while the heatsink is made from 85% recycled aluminium. Because of its circular design, the luminaire is upgradable, reusable, fully serviceable and recyclable. Combined with the high energy efficiency, this makes the GreenSpace Evo Mini Cylinder a sustainable choice. The new PerfectAccent deep reflectors ensure a light effect with increased sparkle and improved shopper eye comfort. Further customization of colors and textures is possible via Philips MyCreation

Benefits

- The sleek and subtle design fits perfectly in any installation
- More sparkle and enhanced shopper eye comfort with PerfectAccent deep reflectors
- Extend the useful life of the product with easy serviceability and upgradeability
- The recycled materials and high energy efficiency help further reduce the carbon footprint of the product

Applications

- Fashion
- Hospitality
- Residential

Features

- Toolless access to the optics, LED and front glass
- Serviceable and upgradeable with standard tools
- Reduced carbon footprint due to high efficacy
- Equipped with state-of-the-art PerfectAccent deep reflectors
- Connectivity options: Interact compatible DALI (DIA) and Wireless (WIA)
- Optional front glass (recommended for dusty environments)
- Cleaning of the optic should only be done with pressurized air. Touching the LED or reflector is forbidden. For food preparation areas and areas with high levels of dust, the use of the optional front glass is strongly advised, as it can be cleaned with a (dry) microfiber cloth

Versions

SA332C GreenSpace Evo Mini Cylinder PSU - Black



SA332C GreenSpace Evo Mini Cylinder DIA-WIA - White



SA332C GreenSpace Evo Mini Cylinder DIA-WIA - Black



SA332C GreenSpace Evo Mini Cylinder DIA-WIA - Grey



SA332C GreenSpace Evo Mini Cylinder PSU - White



Dimensional drawing

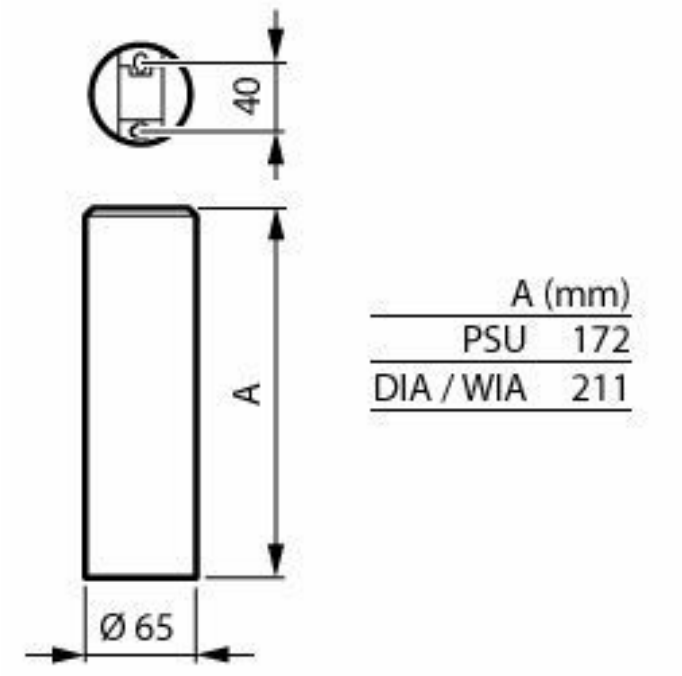

SA332C 10S/PC930 WIA HMB WH481

General Information

Light source replaceable	Yes
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes

Light Technical

Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	>90

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Suitable for random switching	Yes
Protection class IEC	Safety class II

Mechanical and Housing

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	-
CE mark	Yes
ENEC mark	-
Ambient temperature range	+10 to +35 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.422, 0.386) SDCM <2

Product Data

Product family code	SA332C [GreenSpace Evo Mini Cylinder]

Light Technical

Order Code	Full Product Name	Luminous Flux	Luminous Efficacy (rated) (Nom)	Optic type
910505104953	SA332C 10S/PC930 PSU HMB BK482	1,021 lm	125 lm/W	High-reflective metal reflector Medium beam 20 to 40 degrees
910505104954	SA332C 12S/PW930 PSU HWB BK482	1,355 lm	126 lm/W	High-reflective metal reflector Wide beam 40 to 80 degrees
910505104956	SA332C 10S/PC930 DIA HMB WH481	1,021 lm	121 lm/W	High-reflective metal reflector Medium beam 20 to 40 degrees
910505104957	SA332C 12S/PW930 DIA HWB WH481	1,355 lm	122 lm/W	High-reflective metal reflector Wide beam 40 to 80 degrees
910505104959	SA332C 10S/PC930 WIA HMB WH481	1,021 lm	119 lm/W	High-reflective metal reflector Medium beam 20 to 40 degrees
910505104958	SA332C 8S/PW930 WIA HNB BK482	790 lm	111 lm/W	High-reflective metal reflector Narrow beam 10 to 20 degrees
910505104960	SA332C 12S/PW930 WIA HWB BK482	1,355 lm	122 lm/W	High-reflective metal reflector Wide beam 40 to 80 degrees
910505104955	SA332C 8S/PW930 DIA HNB GR482	790 lm	114 lm/W	High-reflective metal reflector Narrow beam 10 to 20 degrees
910505104952	SA332C 8S/PW930 PSU HNB WH481	790 lm	122 lm/W	High-reflective metal reflector Narrow beam 10 to 20 degrees

Operating and Electrical

Order Code	Full Product Name	Power Consumption
910505104953	SA332C 10S/PC930 PSU HMB BK482	8.1 W
910505104954	SA332C 12S/PW930 PSU HWB BK482	10 W
910505104956	SA332C 10S/PC930 DIA HMB WH481	8.5 W
910505104957	SA332C 12S/PW930 DIA HWB WH481	10.3 W
910505104959	SA332C 10S/PC930 WIA HMB WH481	8.6 W

Order Code	Full Product Name	Power Consumption
910505104958	SA332C 8S/PW930 WIA HNB BK482	7.1 W
910505104960	SA332C 12S/PW930 WIA HWB BK482	10.3 W
910505104955	SA332C 8S/PW930 DIA HNB GR482	6.9 W
910505104952	SA332C 8S/PW930 PSU HNB WH481	6.5 W

Controls and Dimming

Order Code	Full Product Name	Dimmable
910505104953	SA332C 10S/PC930 PSU HMB BK482	No
910505104954	SA332C 12S/PW930 PSU HWB BK482	No
910505104956	SA332C 10S/PC930 DIA HMB WH481	Yes
910505104957	SA332C 12S/PW930 DIA HWB WH481	Yes
910505104959	SA332C 10S/PC930 WIA HMB WH481	Yes
910505104958	SA332C 8S/PW930 WIA HNB BK482	Yes
910505104960	SA332C 12S/PW930 WIA HWB BK482	Yes
910505104955	SA332C 8S/PW930 DIA HNB GR482	Yes
910505104952	SA332C 8S/PW930 PSU HNB WH481	No

Mechanical and Housing

Order Code	Full Product Name	Housing Color
910505104953	SA332C 10S/PC930 PSU HMB BK482	Black
910505104954	SA332C 12S/PW930 PSU HWB BK482	Black
910505104956	SA332C 10S/PC930 DIA HMB WH481	White
910505104957	SA332C 12S/PW930 DIA HWB WH481	White
910505104959	SA332C 10S/PC930 WIA HMB WH481	White
910505104958	SA332C 8S/PW930 WIA HNB BK482	Black
910505104960	SA332C 12S/PW930 WIA HWB BK482	Black
910505104955	SA332C 8S/PW930 DIA HNB GR482	Gray
910505104952	SA332C 8S/PW930 PSU HNB WH481	White

Polar normal diagrams

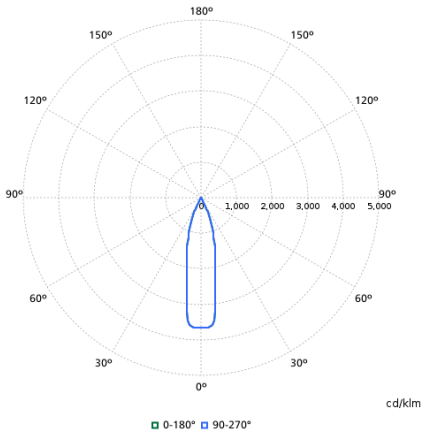

SA332C 10S/PC930 DIA HMB WH481
910505104956

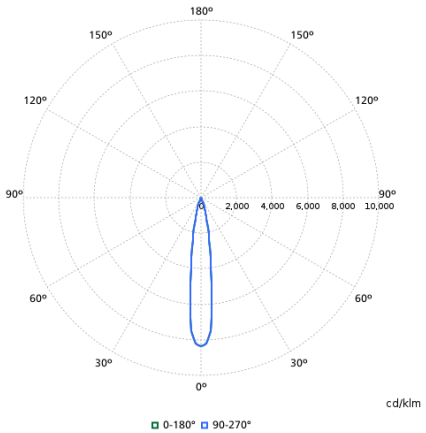

SA332C 8S/PW930 PSU HNB WH481
910505104952

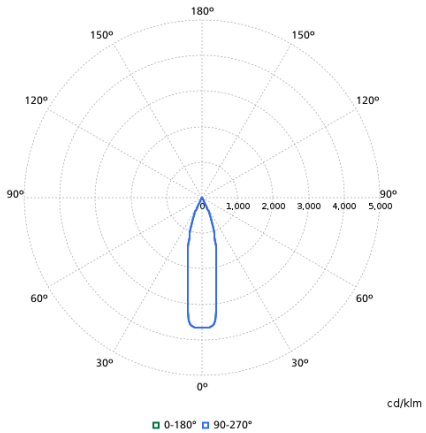

SA332C 10S/PC930 WIA HMB WH481
910505104959

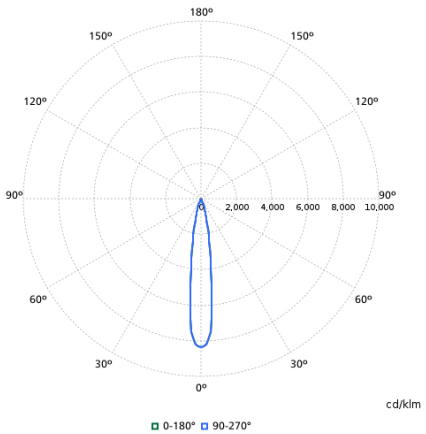

SA332C 8S/PW930 WIA HNB BK482
910505104958

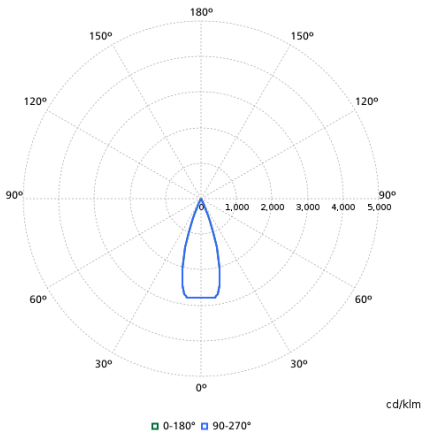

SA332C 12S/PW930 PSU HWB BK482
910505104954

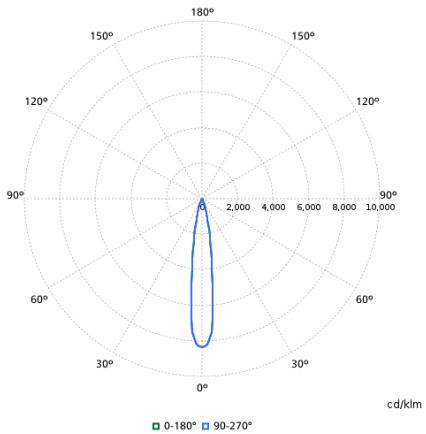

SA332C 8S/PW930 DIA HNB GR482
910505104955

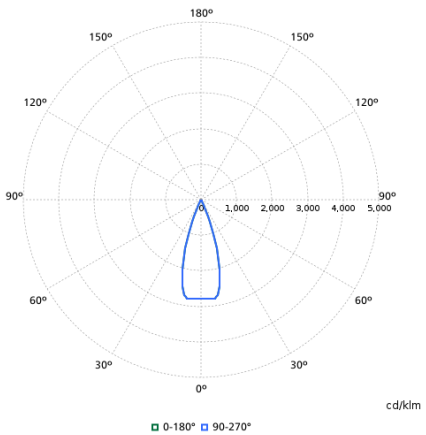

SA332C 12S/PW930 DIA HWB WH481
910505104957

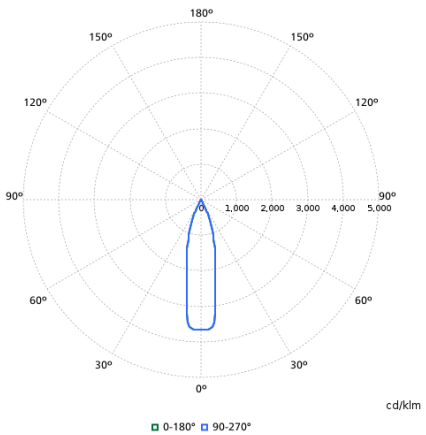

SA332C 10S/PC930 PSU HMB BK482
910505104953

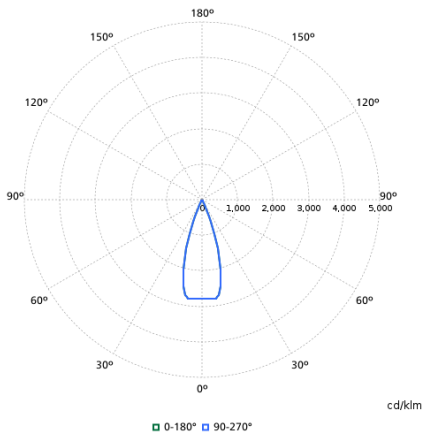

SA332C 12S/PW930 WIA HWB BK482
910505104960

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.