PHILIPS

Essential LED Waterproof

7187491



Great energy efficient LED Waterproof

The Essential LED Waterproof is a highly efficient LED waterproof at a very competitive price.

Benefits

- Philips great quality and reliability
- Long lifetime
- Energy efficient

Features

- Robust and waterproof luminaire
- Multiple light levels and colour temperatures available
- Steel clips ensure extra product robustness

Applications

- Manufacturing
- Parking Garages
- Warehouses

Versions



Essential LED Waterproof



Essential LED Waterproof

Data subject to change

Dimensional drawing

Descrição Descripción Description	CCT	Potência Potencia Power	Fluxo luminoso Flujo luminoso Luminous flux	L mm	W mm	H mm	LF mm	
WT063C LED20S/NW PSU	4000 K	17 W	2000 lm	576	81	75	240	0,72 Kg
WT063C LED20S/CW PSU	6500 K	17 W	2000 lm	576	81	75	240	0,72 Kg
WT063C LED43S/NW PSU	4000 K	38 W	4300 lm	1156	81	75	680	1,40 Kg
WT063C LED43S/CW PSU	6500 K	38 W	4300 lm	1156	81	75	680	1,40 Kg

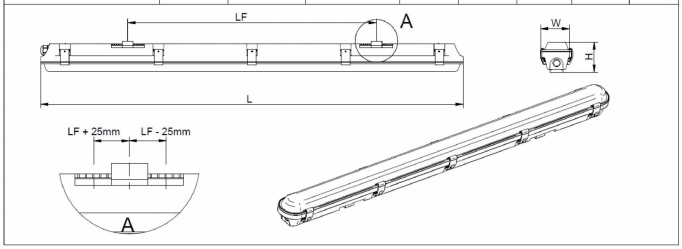

WT063C LED20S/CW PSU G2

Descrição Descripción Description	CCT	Potência Potencia Power	Fluxo luminoso Flujo luminoso Luminous flux	L mm	W mm	H mm	LF mm	
WT063C LED20S/NW PSU	4000 K	17 W	2000 lm	576	81	75	240	0,72 Kg
WT063C LED20S/CW PSU	6500 K	17 W	2000 lm	576	81	75	240	0,72 Kg
WT063C LED43S/NW PSU	4000 K	38 W	4300 lm	1156	81	75	680	1,40 Kg
WT063C LED43S/CW PSU	6500 K	38 W	4300 lm	1156	81	75	680	1,40 Kg

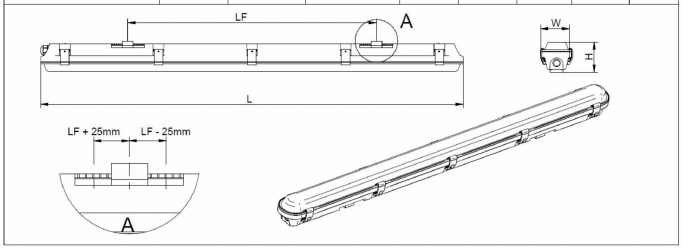

WT063C LED43S/CW PSU G2

General Information

Lamp family code	-
Light source replaceable	No
Driver included	Yes

Light Technical

Color rendering index (CRI)	≥80

Operating and Electrical

Input Voltage	100 to 277 V
Line Frequency	50 or 60 Hz
Protection class IEC	Safety class I

Controls and Dimming

Dimmable	No

Mechanical and Housing

Housing Color	Gray
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [6 J]

Approval and Application

Ambient temperature range	-20 to +40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	-10% / +10%

Light Technical

Order Code	Full Product Name	Luminous Flux	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)
911401804087	WT063C LED43S/CW PSU G2	4,300 lm	6500 K	116 lm/W
911401803787	WT063C LED20S/NW PSU G2	2,000 lm	4000 K	118 lm/W
911401803887	WT063C LED20S/CW PSU G2	2,000 lm	6500 K	118 lm/W

Operating and Electrical

Order Code	Full Product Name	Power Consumption
911401804087	WT063C LED43S/CW PSU G2	37 W
911401803787	WT063C LED20S/NW PSU G2	17 W
911401803887	WT063C LED20S/CW PSU G2	17 W

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.