PHILIPS

UVA TL

XPUVATL



UVA TL – high quality multipurpose UVA lamps

Philips offers highly quality TL lamps emitting UV-A in a spectral distribution wavelength of between 315 to 380 nm. This makes these lamps suitable for various applications such as phototherapy, curing & Photocatalytic oxidation

Benefits

- Optimal spectrum for various applications

Applications

- Phototherapy
- Curing
- Photocatalytic Oxidation

Features

- Emission peak at 350 nm
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Photobiological safety – IEC 62471 - Risk Group 2. CAUTION – UV Emitted from these products.

Versions



XPPR_XUVATL_G13_--Product photo

Data subject to change

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
F71T12 UVA 100W	40.5 mm	1,763.8 mm	1,770.9 mm	1,768.5 mm	1,778 mm

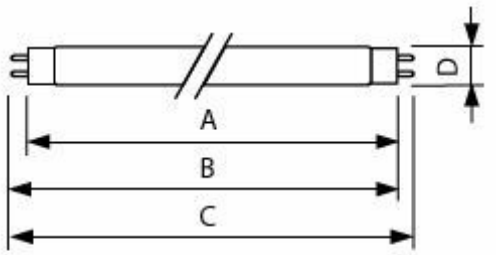

General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]

Light Technical

Color Code	209
Color Designation	Ultra Violet A

Operating and Electrical

Power Consumption	100 W
Lamp Current (Nom)	0.97 A

Mechanical and Housing

Bulb Shape	T38

Approval and Application

Mercury (Hg) Content (Nom)	14.0 mg

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.