PHILIPS

TL Rapid Start Standard Colours

TLRSSTD



T12 lamp with reliable ignition

The TL RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating. It is suitable for situations where high humidity requires fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Benefits

- Creating atmospheres from warm white to cool daylight
- Fast, well-defined ignition at low temperatures

Applications

- Mostly used in applications where color rendering is not an important factor

Features

- RS (Rapid Start) lamps with an external silicon coating
- Standard colors with moderate color rendering
- Available in varying color designations

Versions



LPPR TL-RS G13

Dimensional drawing

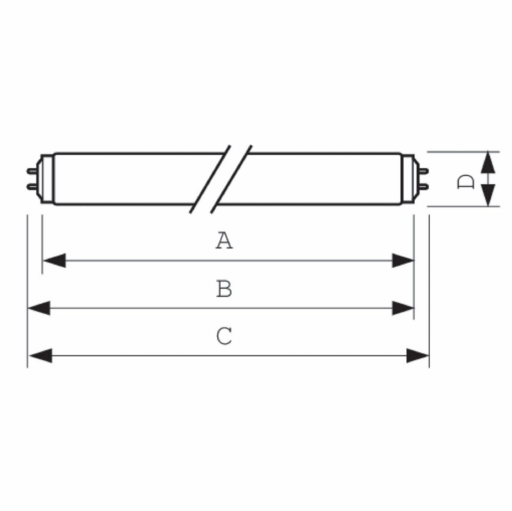

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL RS 40W/54-765 1SL/25	40.5 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm

General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]

Light Technical

Luminous Flux	2,500 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6200 K
Luminous Efficacy (rated) (Nom)	64 lm/W
Color rendering index (CRI)	72

Operating and Electrical

Power Consumption	39.0 W
Lamp Current (Nom)	0.430 A
Voltage (Nom)	101 V

Controls and Dimming

Dimmable	Yes

Mechanical and Housing

Bulb Shape	T12

Approval and Application

Mercury (Hg) Content (Nom)	8.0 mg

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.