PHILIPS

StoreSet Linear

SM504T



StoreSet Linear – A slim, discreet design for smaller format stores of the future

StoreSet Linear is an ultra-flexible linear luminaire for retail track systems that offers excellent quality with the promise of future-proof upgrades. In retail applications such as supermarkets, city format shops, express stores, each linear panel can be combined with a wide range of spots from our portfolio, and integrated smoothly into your existing track system. So you can give your merchandise sparkle and stand out on the shelves, as well as in aisles and open areas. StoreSet Linear (SM504T) has a discreet, slim panel design that makes it easy to position the luminaires anywhere you like along the tracks - and accommodate future layout changes. Versions with a wireless driver offer enhanced comfort with dimming and scene setting on existing three-circuit track-mounted infrastructure without the need for wired controls. Plus integrated sensors for data collection will shed light on insightful, granular information that you can use to support your business.

Benefits

- Customized store ambiences with a high-flux linear luminaires and flexible positioning to suit any store layout
- Excellent quality of light combined with a wide range of high-efficiency optics and various color recipes
- Slim, discreet linear design that can be mixed with accent lighting projectors
- Easy maintenance with toolless access to driver
- Lighting designed for circularity

Applications

- Food and Large Retailers
- Retail

- Petrol and Convenience
- City format shops, express stores, proximity formats

Features

- Wide range of beams with OptiSuit optics available
- 3C track (SM504T) installation
- Efficient solution: up to 150 lumen per Watt (XA version)
- Robust but lightweight aluminum construction with plastic end caps
- Controls: Wired (DALI) and wireless connectivity, indoor positioning options available to enable our connected systems Interact for Retail and Interact Pro
- Color quality choices: standard, CRI90 and PremiumWhite
- Lighting designed for circularity with serviceable driver and integrated sensors
- The canopy and optical surfaces must only ever be cleaned with a lint-free cloth and without detergents.

Versions



StoreSet Linear full length, black



StoreSet Linear full length, white



StoreSet Linear full length, silver

Dimensional drawing

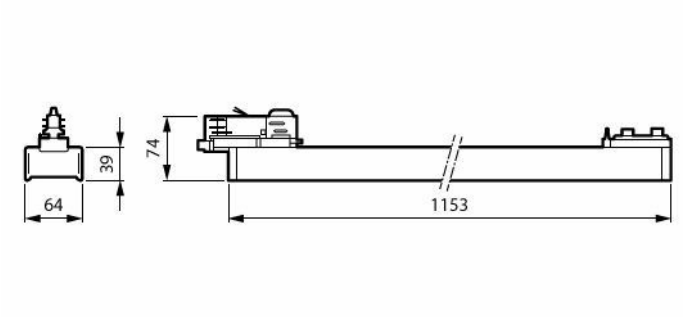

STORESET LINEAR - Dali dimming IntarAct System ready visual light communicaton enabled - Double asymmetric optic 35° wide beam - 104° x 98°

Product details

StoreSet Linear close-up track adaptor on track, black



StoreSet Linear close-up track adaptor on track, white



StoreSet Linear close-up mech adaptor on track, silver



StoreSet Linear close-up track adaptor on track, silver



StoreSet Linear close-up track adaptor + endcap, silver



StoreSet Linear top view mechanical adaptor, silver



StoreSet Linear top view mechanical adaptor, black



StoreSet Linear close-up mech adaptor + endcap, white



StoreSet Linear close-up mech adaptor on track, white



StoreSet Linear close-up mech adaptor + endcap, silver





StoreSet Linear close-up track adaptor + endcap, white



StoreSet Linear top view track adaptor, white



StoreSet Linear close-up mech adaptor on track, black



StoreSet Linear close-up track adaptor + endcap, black



StoreSet Linear top view track adaptor, silver



StoreSet Linear top view track adaptor, black



StoreSet Linear top view mechanical adaptor, white



StoreSet Linear close-up mech adaptor + endcap, black

General Information

Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes

Light Technical

Beam angle of light source	120 degree(s)

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Suitable for random switching	Yes
Protection class IEC	Safety class I

Controls and Dimming

Embedded control	Visible light communication

Mechanical and Housing

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	+10 to +35 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%

Product Data

Product family code	SM504T [STORESET LINEAR]

Light Technical

Order Code	Full Product Name	Luminous Flux	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)	Optic type
910505102211	SM504T 61S/840 DIA-VLC WB BK	6,100 lm	4000 K	129 lm/W	>80	Wide beam
910505102215	SM504T 80S/830 PSU WB BK	8,000 lm	3000 K	140 lm/W	>80	Wide beam
910505102383	SM504T 80S/940 PSU WB BK	7,900 lm	4000 K	143 lm/W	>90	Wide beam
910505102387	SM504T 66S/940 DIA-VLC WB BK	6,700 lm	4000 K	142 lm/W	>90	Wide beam
910505102388	SM504T 66S/PW935 DIA-VLC DA35W BK	6,500 lm	3500 K	144 lm/W	>90	Double asymmetric optic 35° wide beam

Order Code	Full Product Name	Luminous Flux	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)	Optic type
910505102389	SM504T 80S/930 DIA-VLC WB BK	7,900 lm	3000 K	136 lm/W	>90	Wide beam
910505102565	SM504T 80S/830 DIA-VLC WB BK	8,000 lm	3000 K	137 lm/W	>80	Wide beam
910505104961	SM504T 61S/830 PSU WB BK	6,100 lm	3000 K	120 lm/W	>80	Wide beam
910505104963	SM504T 61S/840 PSU WB BK	6,100 lm	4000 K	130 lm/W	>80	Wide beam
910505104964	SM504T 80S/840 DIA-VLC WB BK	8,000 lm	4000 K	148 lm/W	>80	Wide beam
910505102209	SM504T 61S/830 PSU WB WH	6,100 lm	3000 K	119 lm/W	>80	Wide beam
910505102210	SM504T 61S/830 DIA-VLC DA35W WH	6,100 lm	3000 K	119 lm/W	>80	Double asymmetric optic 35° wide beam
910505102212	SM504T 61S/840 PSU A20-L WH	6,100 lm	4000 K	129 lm/W	>80	Asymmetrical mirror axis angle 20°
910505102214	SM504T 66S/840 PSU DA45 WH	6,600 lm	4000 K	154 lm/W	>80	Double asymmetric optic 45°
910505102218	SM504T 80S/840 PSU A20-L WH	8,000 lm	4000 K	150 lm/W	>80	Asymmetrical mirror axis angle 20°
910505102219	SM504T 80S/840 PSU DA45 WH	8,000 lm	4000 K	150 lm/W	>80	Double asymmetric optic 45°
910505102223	SM504T 66S/830 DIA-VLC WB WH XA	6,600 lm	3000 K	150 lm/W	>80	Wide beam
910505102224	SM504T 66S/840 DIA-VLC DA35W WH XA	6,600 lm	4000 K	160 lm/W	>80	Double asymmetric optic 35° wide beam
910505102228	SM504T 90S/840 PSU DA35W WH XA	9,000 lm	4000 K	155 lm/W	>80	Double asymmetric optic 35° wide beam
910505102382	SM504T 66S/PW930 PSU DA35W WH	6,700 lm	3000 K	139 lm/W	>90	Double asymmetric optic 35° wide beam
910505102384	SM504T 80S/PW935 PSU A20-L WH	8,000 lm	3500 K	137 lm/W	>90	Asymmetrical mirror axis angle 20°
910505102386	SM504T 90S/PW930 PSU DA45 WH	8,900 lm	3000 K	130 lm/W	>90	Double asymmetric optic 45°
910505102390	SM504T 80S/PW930 DIA-VLC A20-L WH	7,800 lm	3000 K	134 lm/W	>90	Asymmetrical mirror axis angle 20°
910505102391	SM504T 90S/940 DIA-VLC DA45 WH	8,800 lm	4000 K	144 lm/W	>90	Double asymmetric optic 45°
910505102392	SM504T 90S/PW935 DIA-VLC DA25N WH	9,000 lm	3500 K	136 lm/W	>90	Double asymmetric optic 25° narrow beam
910505102393	SM504T 66S/830 WIA DA35W WH	6,600 lm	3000 K	143 lm/W	>80	Double asymmetric optic 35° wide beam
910505102395	SM504T 66S/930 WIA WB WH	6,800 lm	3000 K	138 lm/W	>90	Wide beam
910505102396	SM504T 66S/940 WIA DA35W WH	6,700 lm	4000 K	145 lm/W	>90	Double asymmetric optic 35° wide beam
910505102397	SM504T 80S/830 WIA A20-L WH	8,000 lm	3000 K	134 lm/W	>80	Asymmetrical mirror axis angle 20°
910505102398	SM504T 80S/840 WIA WB WH	8,000 lm	4000 K	148 lm/W	>80	Wide beam
910505102399	SM504T 80S/930 WIA WB WH	7,900 lm	3000 K	136 lm/W	>90	Wide beam
910505102401	SM504T 80S/940 WIA DA35W WH	7,900 lm	4000 K	141 lm/W	>90	Double asymmetric optic 35° wide beam
910505102402	SM504T 66S/930 PSU WB WH	6,800 lm	3000 K	141 lm/W	>90	Wide beam
910505102564	SM504T 80S/830 DIA-VLC A20-L WH XA	8,000 lm	3000 K	145 lm/W	>80	Asymmetrical mirror axis angle 20°
910505102566	SM504T 80S/840 DIA-VLC DA25N WH	8,000 lm	4000 K	148 lm/W	>80	Double asymmetric optic 25° narrow beam
910505102567	SM504T 90S/830 DIA-VLC DA35W WH	8,700 lm	3000 K	135 lm/W	>80	Double asymmetric optic 35° wide beam
910505102568	SM504T 90S/830 DIA-VLC WB WH XA	9,000 lm	3000 K	145 lm/W	>80	Wide beam

Order Code	Full Product Name	Luminous Flux	Correlated Color Temperature (Nom)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)	Optic type
910505104962	SM504T 61S/840 PSU WB WH	6,100 lm	4000 K	130 lm/W	>80	Wide beam
910505104965	SM504T 80S/840 DIA-VLC WB WH	8,000 lm	4000 K	148 lm/W	>80	Wide beam
910505104971	SM504T 80S/830 DIA-VLC WB WH	8,000 lm	3000 K	140 lm/W	>80	Wide beam
910505102213	SM504T 66S/830 DIA-VLC WB SI	6,600 lm	3000 K	143 lm/W	>80	Wide beam
910505102222	SM504T 90S/840 PSU WB SI	9,200 lm	4000 K	146 lm/W	>80	Wide beam
910505102385	SM504T 90S/930 PSU WB SI	9,000 lm	3000 K	132 lm/W	>90	Wide beam
910505102394	SM504T 66S/840 WIA WB SI	6,600 lm	4000 K	154 lm/W	>80	Wide beam

Operating and Electrical

Order Code	Full Product Name	Power Consumption
910505102211	SM504T 61S/840 DIA-VLC WB BK	47 W
910505102215	SM504T 80S/830 PSU WB BK	57 W
910505102383	SM504T 80S/940 PSU WB BK	55 W
910505102387	SM504T 66S/940 DIA-VLC WB BK	45 W
910505102388	SM504T 66S/PW935 DIA-VLC DA35W BK	45 W
910505102389	SM504T 80S/930 DIA-VLC WB BK	58 W
910505102565	SM504T 80S/830 DIA-VLC WB BK	57 W
910505104961	SM504T 61S/830 PSU WB BK	51 W
910505104963	SM504T 61S/840 PSU WB BK	47 W
910505104964	SM504T 80S/840 DIA-VLC WB BK	54 W
910505102209	SM504T 61S/830 PSU WB WH	51 W
910505102210	SM504T 61S/830 DIA-VLC DA35W WH	51 W
910505102212	SM504T 61S/840 PSU A20-L WH	47 W
910505102214	SM504T 66S/840 PSU DA45 WH	43 W
910505102218	SM504T 80S/840 PSU A20-L WH	54 W
910505102219	SM504T 80S/840 PSU DA45 WH	54 W
910505102223	SM504T 66S/830 DIA-VLC WB WH XA	44 W
910505102224	SM504T 66S/840 DIA-VLC DA35W WH XA	41 W
910505102228	SM504T 90S/840 PSU DA35W WH XA	58 W
910505102382	SM504T 66S/PW930 PSU DA35W WH	48 W
910505102384	SM504T 80S/PW935 PSU A20-L WH	58 W
910505102386	SM504T 90S/PW930 PSU DA45 WH	68 W
910505102390	SM504T 80S/PW930 DIA-VLC A20-L WH	58 W
910505102391	SM504T 90S/940 DIA-VLC DA45 WH	61 W
910505102392	SM504T 90S/PW935 DIA-VLC DA25N WH	65 W
910505102393	SM504T 66S/830 WIA DA35W WH	46 W
910505102395	SM504T 66S/930 WIA WB WH	48 W
910505102396	SM504T 66S/940 WIA DA35W WH	45 W
910505102397	SM504T 80S/830 WIA A20-L WH	57 W

Order Code	Full Product Name	Power Consumption
910505102398	SM504T 80S/840 WIA WB WH	54 W
910505102399	SM504T 80S/930 WIA WB WH	58 W
910505102401	SM504T 80S/940 WIA DA35W WH	55 W
910505102402	SM504T 66S/930 PSU WB WH	48 W
910505102564	SM504T 80S/830 DIA-VLC A20-L WH XA	54 W
910505102566	SM504T 80S/840 DIA-VLC DA25N WH	54 W
910505102567	SM504T 90S/830 DIA-VLC DA35W WH	63 W
910505102568	SM504T 90S/830 DIA-VLC WB WH XA	62 W
910505104962	SM504T 61S/840 PSU WB WH	47 W
910505104965	SM504T 80S/840 DIA-VLC WB WH	54 W
910505104971	SM504T 80S/830 DIA-VLC WB WH	57 W
910505102213	SM504T 66S/830 DIA-VLC WB SI	46 W
910505102222	SM504T 90S/840 PSU WB SI	63 W
910505102385	SM504T 90S/930 PSU WB SI	68 W
910505102394	SM504T 66S/840 WIA WB SI	43 W

Controls and Dimming

Order Code	Full Product Name	Dimmable	Maximum dim level
910505102211	SM504T 61S/840 DIA-VLC WB BK	Yes	1%
910505102215	SM504T 80S/830 PSU WB BK	No	Not applicable
910505102383	SM504T 80S/940 PSU WB BK	No	Not applicable
910505102387	SM504T 66S/940 DIA-VLC WB BK	Yes	1%
910505102388	SM504T 66S/PW935 DIA-VLC DA35W BK	Yes	1%
910505102389	SM504T 80S/930 DIA-VLC WB BK	Yes	1%
910505102565	SM504T 80S/830 DIA-VLC WB BK	Yes	1%
910505104961	SM504T 61S/830 PSU WB BK	No	Not applicable
910505104963	SM504T 61S/840 PSU WB BK	No	Not applicable
910505104964	SM504T 80S/840 DIA-VLC WB BK	Yes	1%
910505102209	SM504T 61S/830 PSU WB WH	No	Not applicable
910505102210	SM504T 61S/830 DIA-VLC DA35W WH	Yes	1%
910505102212	SM504T 61S/840 PSU A20-L WH	No	Not applicable
910505102214	SM504T 66S/840 PSU DA45 WH	No	Not applicable
910505102218	SM504T 80S/840 PSU A20-L WH	No	Not applicable
910505102219	SM504T 80S/840 PSU DA45 WH	No	Not applicable
910505102223	SM504T 66S/830 DIA-VLC WB WH XA	Yes	1%
910505102224	SM504T 66S/840 DIA-VLC DA35W WH XA	Yes	1%
910505102228	SM504T 90S/840 PSU DA35W WH XA	No	Not applicable
910505102382	SM504T 66S/PW930 PSU DA35W WH	No	Not applicable
910505102384	SM504T 80S/PW935 PSU A20-L WH	No	Not applicable
910505102386	SM504T 90S/PW930 PSU DA45 WH	No	Not applicable
910505102390	SM504T 80S/PW930 DIA-VLC A20-L WH	Yes	1%

Order Code	Full Product Name	Dimmable	Maximum dim level
910505102391	SM504T 90S/940 DIA-VLC DA45 WH	Yes	1%
910505102392	SM504T 90S/PW935 DIA-VLC DA25N WH	Yes	1%
910505102393	SM504T 66S/830 WIA DA35W WH	Yes	1%
910505102395	SM504T 66S/930 WIA WB WH	Yes	1%
910505102396	SM504T 66S/940 WIA DA35W WH	Yes	1%
910505102397	SM504T 80S/830 WIA A20-L WH	Yes	1%
910505102398	SM504T 80S/840 WIA WB WH	Yes	1%
910505102399	SM504T 80S/930 WIA WB WH	Yes	1%
910505102401	SM504T 80S/940 WIA DA35W WH	Yes	1%
910505102402	SM504T 66S/930 PSU WB WH	No	Not applicable
910505102564	SM504T 80S/830 DIA-VLC A20-L WH XA	Yes	1%
910505102566	SM504T 80S/840 DIA-VLC DA25N WH	Yes	1%
910505102567	SM504T 90S/830 DIA-VLC DA35W WH	Yes	1%
910505102568	SM504T 90S/830 DIA-VLC WB WH XA	Yes	1%
910505104962	SM504T 61S/840 PSU WB WH	No	Not applicable
910505104965	SM504T 80S/840 DIA-VLC WB WH	Yes	1%
910505104971	SM504T 80S/830 DIA-VLC WB WH	Yes	1%
910505102213	SM504T 66S/830 DIA-VLC WB SI	Yes	1%
910505102222	SM504T 90S/840 PSU WB SI	No	Not applicable
910505102385	SM504T 90S/930 PSU WB SI	No	Not applicable
910505102394	SM504T 66S/840 WIA WB SI	Yes	1%

Mechanical and Housing

Order Code	Full Product Name	Housing Color
910505102211	SM504T 61S/840 DIA-VLC WB BK	Black
910505102215	SM504T 80S/830 PSU WB BK	Black
910505102383	SM504T 80S/940 PSU WB BK	Black
910505102387	SM504T 66S/940 DIA-VLC WB BK	Black
910505102388	SM504T 66S/PW935 DIA-VLC DA35W BK	Black
910505102389	SM504T 80S/930 DIA-VLC WB BK	Black
910505102565	SM504T 80S/830 DIA-VLC WB BK	Black
910505104961	SM504T 61S/830 PSU WB BK	Black
910505104963	SM504T 61S/840 PSU WB BK	Black
910505104964	SM504T 80S/840 DIA-VLC WB BK	Black
910505102209	SM504T 61S/830 PSU WB WH	White
910505102210	SM504T 61S/830 DIA-VLC DA35W WH	White
910505102212	SM504T 61S/840 PSU A20-L WH	White
910505102214	SM504T 66S/840 PSU DA45 WH	White
910505102218	SM504T 80S/840 PSU A20-L WH	White
910505102219	SM504T 80S/840 PSU DA45 WH	White
910505102223	SM504T 66S/830 DIA-VLC WB WH XA	White

Order Code	Full Product Name	Housing Color
910505102224	SM504T 66S/840 DIA-VLC DA35W WH XA	White
910505102228	SM504T 90S/840 PSU DA35W WH XA	White
910505102382	SM504T 66S/PW930 PSU DA35W WH	White
910505102384	SM504T 80S/PW935 PSU A20-L WH	White
910505102386	SM504T 90S/PW930 PSU DA45 WH	White
910505102390	SM504T 80S/PW930 DIA-VLC A20-L WH	White
910505102391	SM504T 90S/940 DIA-VLC DA45 WH	White
910505102392	SM504T 90S/PW935 DIA-VLC DA25N WH	White
910505102393	SM504T 66S/830 WIA DA35W WH	White
910505102395	SM504T 66S/930 WIA WB WH	White
910505102396	SM504T 66S/940 WIA DA35W WH	White
910505102397	SM504T 80S/830 WIA A20-L WH	White
910505102398	SM504T 80S/840 WIA WB WH	White
910505102399	SM504T 80S/930 WIA WB WH	White
910505102401	SM504T 80S/940 WIA DA35W WH	White
910505102402	SM504T 66S/930 PSU WB WH	White
910505102564	SM504T 80S/830 DIA-VLC A20-L WH XA	White
910505102566	SM504T 80S/840 DIA-VLC DA25N WH	White
910505102567	SM504T 90S/830 DIA-VLC DA35W WH	White
910505102568	SM504T 90S/830 DIA-VLC WB WH XA	White
910505104962	SM504T 61S/840 PSU WB WH	White
910505104965	SM504T 80S/840 DIA-VLC WB WH	White
910505104971	SM504T 80S/830 DIA-VLC WB WH	White
910505102213	SM504T 66S/830 DIA-VLC WB SI	Silver
910505102222	SM504T 90S/840 PSU WB SI	Silver
910505102385	SM504T 90S/930 PSU WB SI	Silver
910505102394	SM504T 66S/840 WIA WB SI	Silver

Initial Performance (IEC Compliant)

Order Code	Full Product Name	Initial chromaticity
910505102211	SM504T 61S/840 DIA-VLC WB BK	(0.38, 0.38) SDCM<3
910505102215	SM504T 80S/830 PSU WB BK	(0.43, 0.40) SDCM<3
910505102383	SM504T 80S/940 PSU WB BK	(0.38, 0.38) SDCM<3
910505102387	SM504T 66S/940 DIA-VLC WB BK	(0.38, 0.38) SDCM<3
910505102388	SM504T 66S/PW935 DIA-VLC DA35W BK	(0.39, 0.38) SDCM<3
910505102389	SM504T 80S/930 DIA-VLC WB BK	(0.43, 0.40) SDCM<3
910505102565	SM504T 80S/830 DIA-VLC WB BK	(0.43, 0.40) SDCM<3
910505104961	SM504T 61S/830 PSU WB BK	(0.43, 0.40) SDCM<3
910505104963	SM504T 61S/840 PSU WB BK	(0.38, 0.38) SDCM<3
910505104964	SM504T 80S/840 DIA-VLC WB BK	(0.38, 0.38) SDCM<3
910505102209	SM504T 61S/830 PSU WB WH	(0.43, 0.40) SDCM<3

Order Code	Full Product Name	Initial chromaticity
910505102210	SM504T 61S/830 DIA-VLC DA35W WH	(0.43, 0.40) SDCM<3
910505102212	SM504T 61S/840 PSU A20-L WH	(0.38, 0.38) SDCM<3
910505102214	SM504T 66S/840 PSU DA45 WH	(0.38, 0.38) SDCM<3
910505102218	SM504T 80S/840 PSU A20-L WH	(0.38, 0.38) SDCM<3
910505102219	SM504T 80S/840 PSU DA45 WH	(0.38, 0.38) SDCM<3
910505102223	SM504T 66S/830 DIA-VLC WB WH XA	(0.43, 0.40) SDCM<3
910505102224	SM504T 66S/840 DIA-VLC DA35W WH XA	(0.38, 0.38) SDCM<3
910505102228	SM504T 90S/840 PSU DA35W WH XA	(0.38, 0.38) SDCM<3
910505102382	SM504T 66S/PW930 PSU DA35W WH	(0.42, 0.39) SDCM<3
910505102384	SM504T 80S/PW935 PSU A20-L WH	(0.39, 0.38) SDCM<3
910505102386	SM504T 90S/PW930 PSU DA45 WH	(0.42, 0.39) SDCM<3
910505102390	SM504T 80S/PW930 DIA-VLC A20-L WH	(0.42, 0.39) SDCM<3
910505102391	SM504T 90S/940 DIA-VLC DA45 WH	(0.38, 0.38) SDCM<3
910505102392	SM504T 90S/PW935 DIA-VLC DA25N WH	(0.39, 0.38) SDCM<3
910505102393	SM504T 66S/830 WIA DA35W WH	(0.43, 0.40) SDCM<3
910505102395	SM504T 66S/930 WIA WB WH	(0.43, 0.40) SDCM<3
910505102396	SM504T 66S/940 WIA DA35W WH	(0.38, 0.38) SDCM<3
910505102397	SM504T 80S/830 WIA A20-L WH	(0.43, 0.40) SDCM<3
910505102398	SM504T 80S/840 WIA WB WH	(0.38, 0.38) SDCM<3
910505102399	SM504T 80S/930 WIA WB WH	(0.43, 0.40) SDCM<3
910505102401	SM504T 80S/940 WIA DA35W WH	(0.38, 0.38) SDCM<3
910505102402	SM504T 66S/930 PSU WB WH	(0.43, 0.40) SDCM<3
910505102564	SM504T 80S/830 DIA-VLC A20-L WH XA	(0.43, 0.40) SDCM<3
910505102566	SM504T 80S/840 DIA-VLC DA25N WH	(0.38, 0.38) SDCM<3
910505102567	SM504T 90S/830 DIA-VLC DA35W WH	(0.43, 0.40) SDCM<3
910505102568	SM504T 90S/830 DIA-VLC WB WH XA	(0.43, 0.40) SDCM<3
910505104962	SM504T 61S/840 PSU WB WH	(0.38, 0.38) SDCM<3
910505104965	SM504T 80S/840 DIA-VLC WB WH	(0.38, 0.38) SDCM<3
910505104971	SM504T 80S/830 DIA-VLC WB WH	(0.43, 0.40) SDCM<3
910505102213	SM504T 66S/830 DIA-VLC WB SI	(0.43, 0.40) SDCM<3
910505102222	SM504T 90S/840 PSU WB SI	(0.38, 0.38) SDCM<3
910505102385	SM504T 90S/930 PSU WB SI	(0.43, 0.40) SDCM<3
910505102394	SM504T 66S/840 WIA WB SI	(0.38, 0.38) SDCM<3

Polar normal diagrams

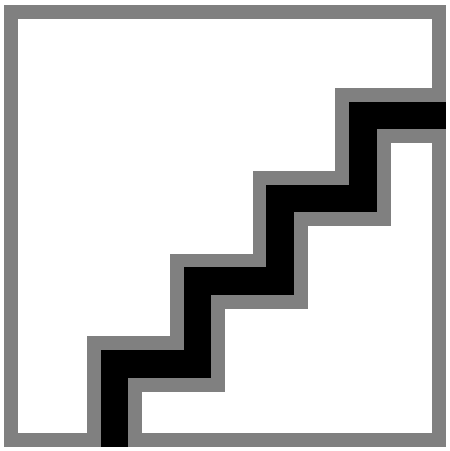

SM504T 90S/840 PSU WB SI
910505102222

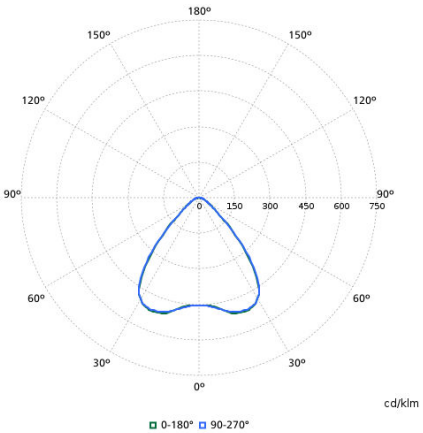

SM504T 66S/940 DIA-VLC WB BK
910505102387

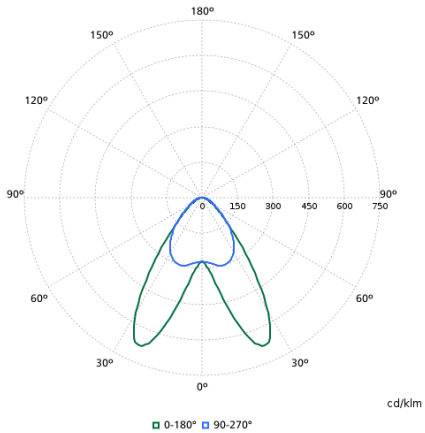

SM504T 90S/PW935 DIA-VLC DA25N WH
910505102392

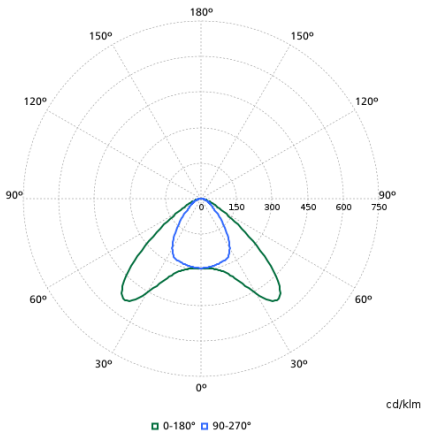

SM504T 66S/840 DIA-VLC DA35W WH XA
910505102224

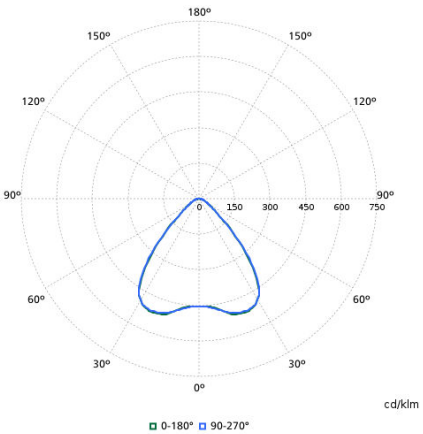

SM504T 66S/830 DIA-VLC WB SI
910505102213

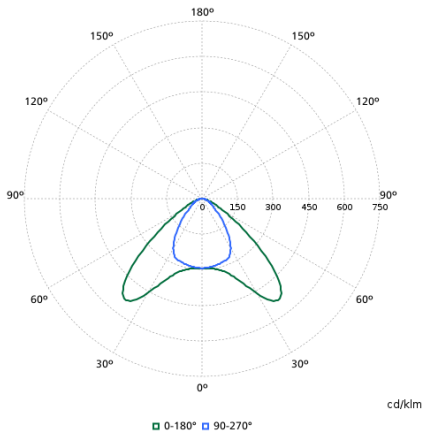

SM504T 61S/830 DIA-VLC DA35W WH
910505102210

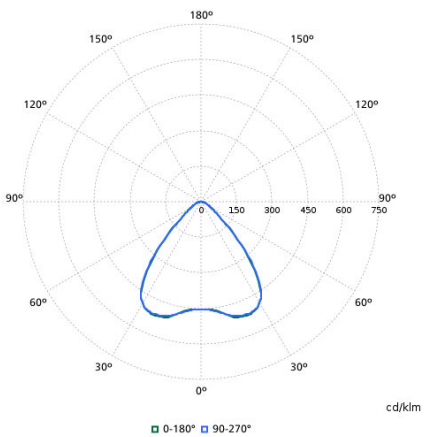

SM504T 90S/930 PSU WB SI
910505102385

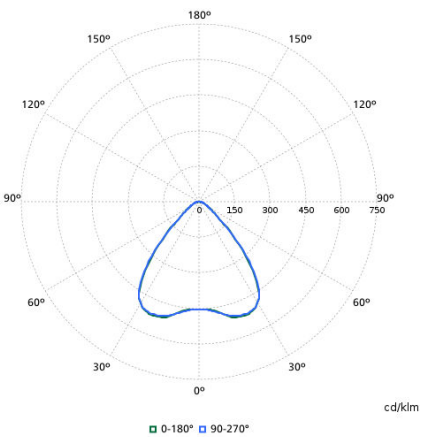

SM504T 80S/930 DIA-VLC WB BK
910505102389

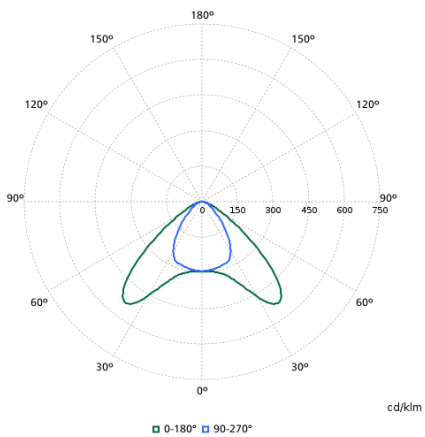

SM504T 66S/PW935 DIA-VLC DA35W BK
910505102388

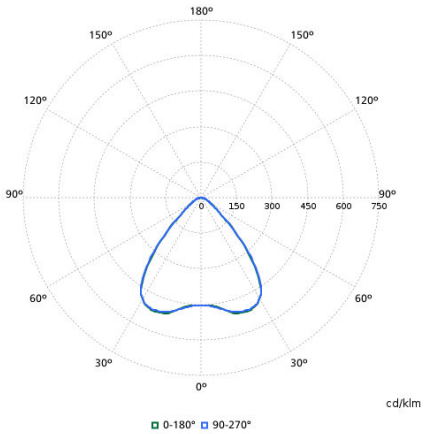

SM504T 80S/830 PSU WB BK
910505102215

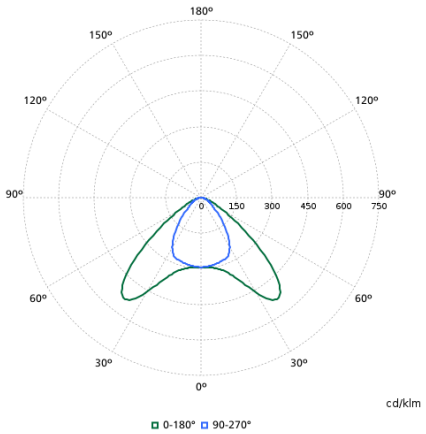

SM504T 66S/940 WIA DA35W WH
910505102396

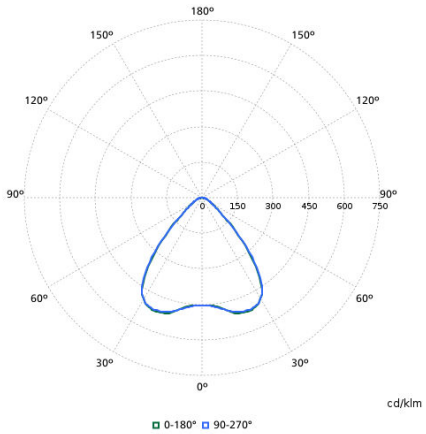

SM504T 61S/840 DIA-VLC WB BK
910505102211

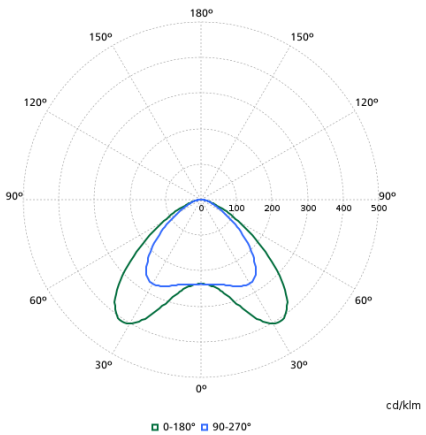

SM504T 66S/840 PSU DA45 WH
910505102214

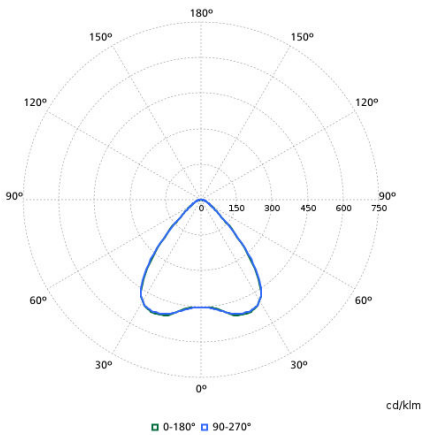

SM504T 61S/830 PSU WB WH
910505102209

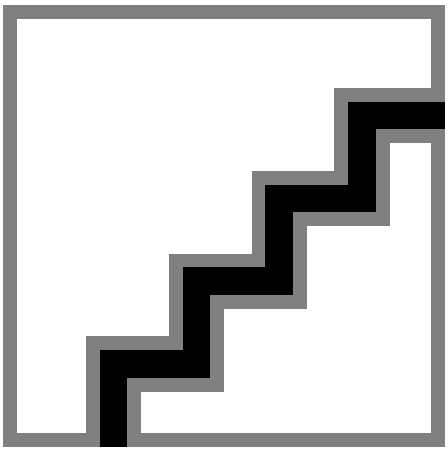

SM504T 66S/830 DIA-VLC WB WH XA
910505102223

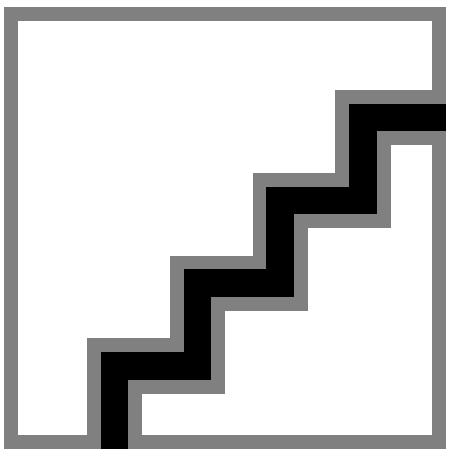

SM504T 80S/840 PSU DA45 WH
910505102219

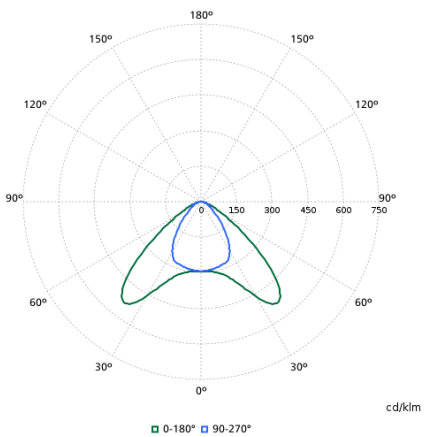

SM504T 90S/840 PSU DA35W WH XA
910505102228

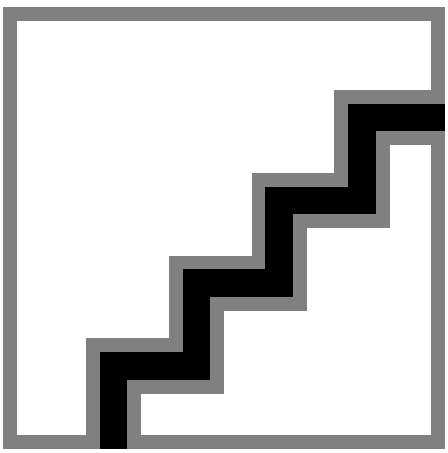

SM504T 80S/PW935 PSU A20-L WH
910505102384

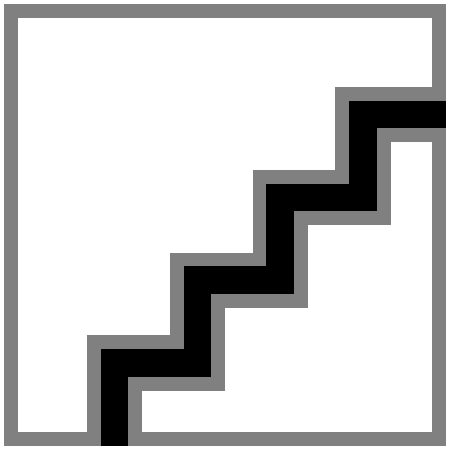

SM504T 61S/840 PSU A20-L WH
910505102212

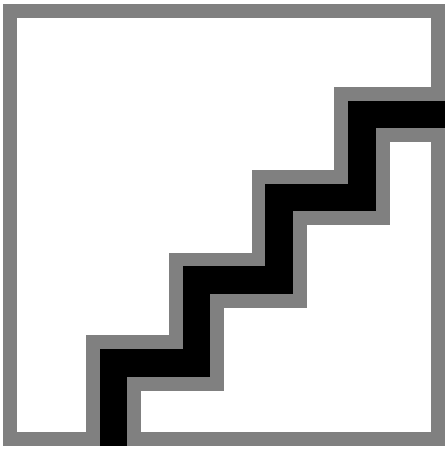

SM504T 80S/840 PSU A20-L WH
910505102218

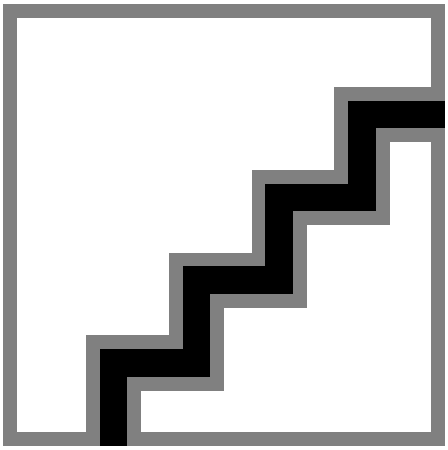

SM504T 80S/830 WIA A20-L WH
910505102397

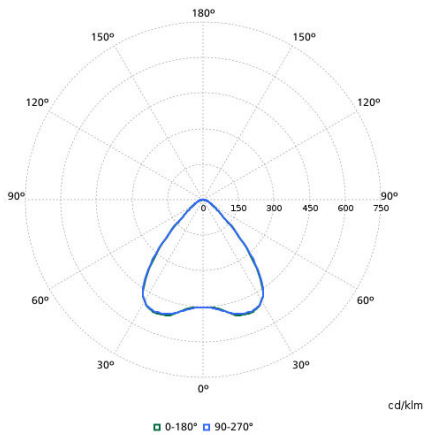

SM504T 66S/930 WIA WB WH
910505102395

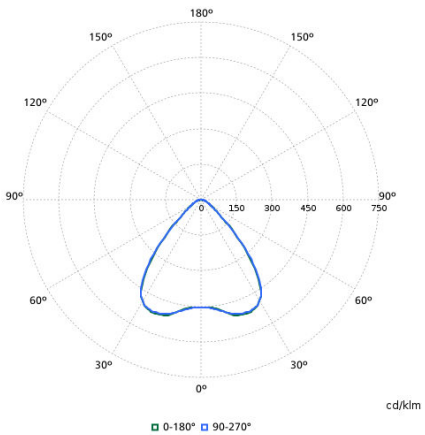

SM504T 66S/840 WIA WB SI
910505102394

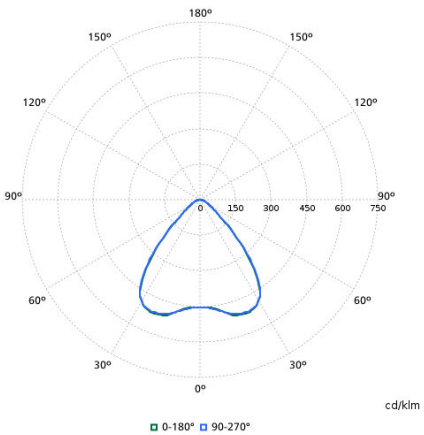

SM504T 80S/840 WIA WB WH
910505102398

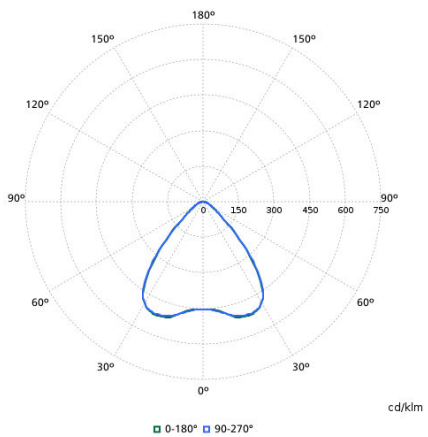

SM504T 80S/940 PSU WB BK
910505102383

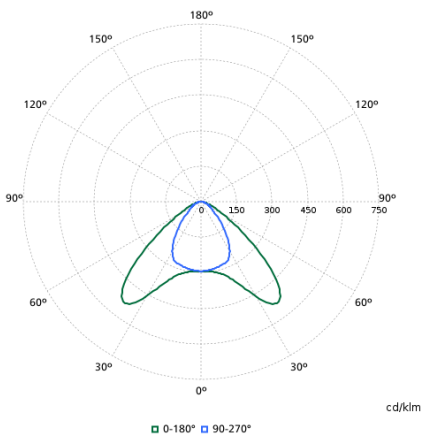

SM504T 66S/PW930 PSU DA35W WH
910505102382

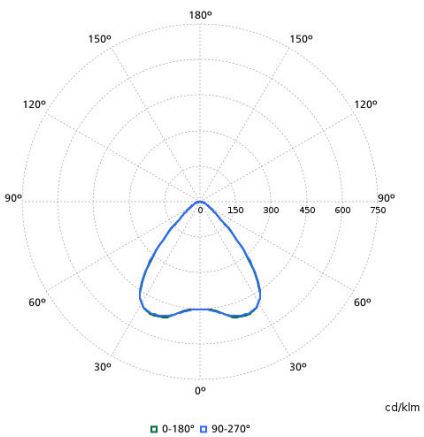

SM504T 66S/930 PSU WB WH
910505102402

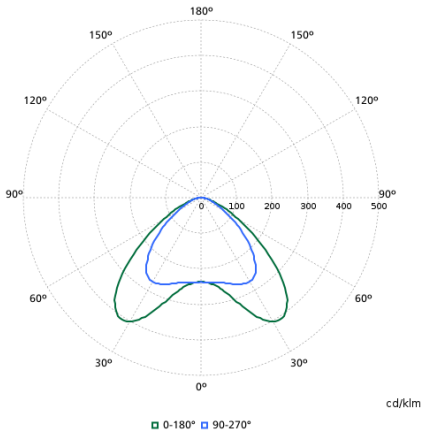

SM504T 90S/PW930 PSU DA45 WH
910505102386

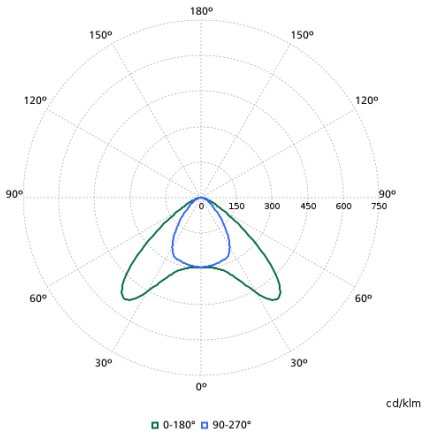

SM504T 66S/830 WIA DA35W WH
910505102393

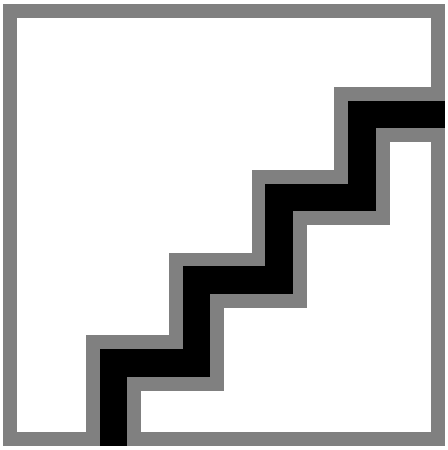

SM504T 80S/PW930 DIA-VLC A20-L WH
910505102390

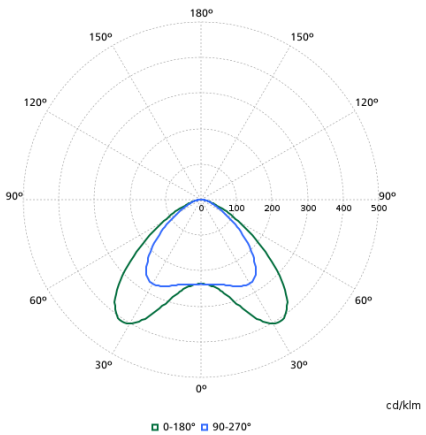

SM504T 90S/940 DIA-VLC DA45 WH
910505102391

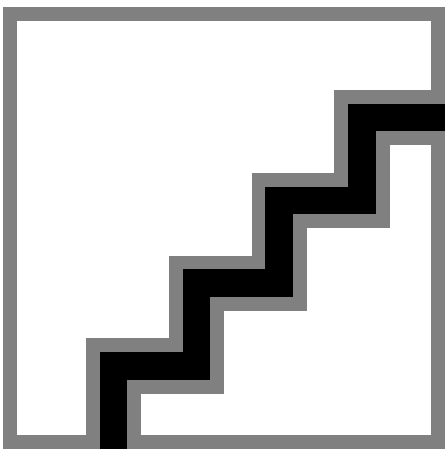

SM504T 80S/930 WIA WB WH
910505102399

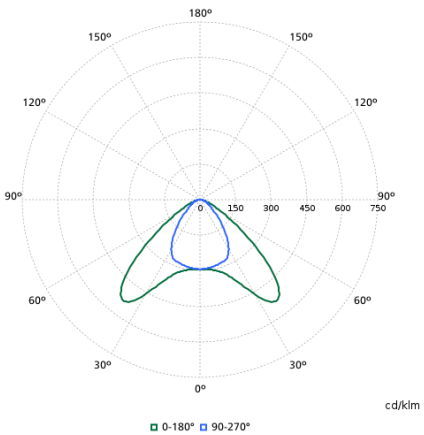

SM504T 80S/940 WIA DA35W WH
910505102401

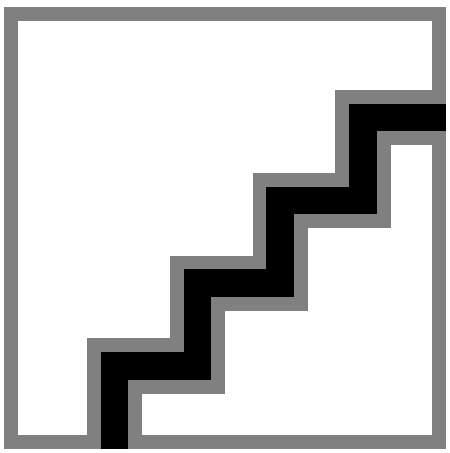

SM504T 80S/830 DIA-VLC A20-L WH XA
910505102564

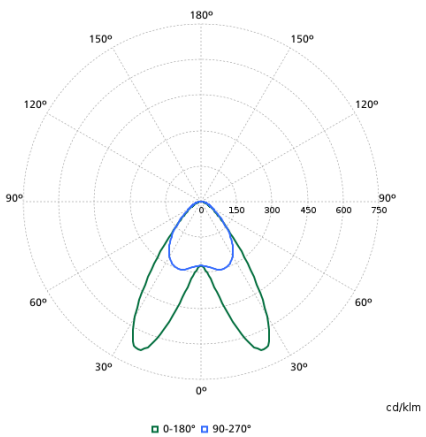

SM504T 80S/840 DIA-VLC DA25N WH
910505102566

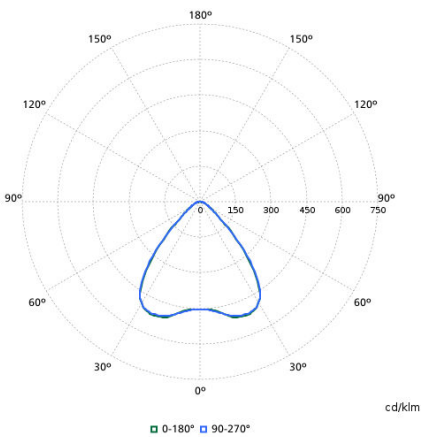

SM504T 90S/830 DIA-VLC WB WH XA
910505102568

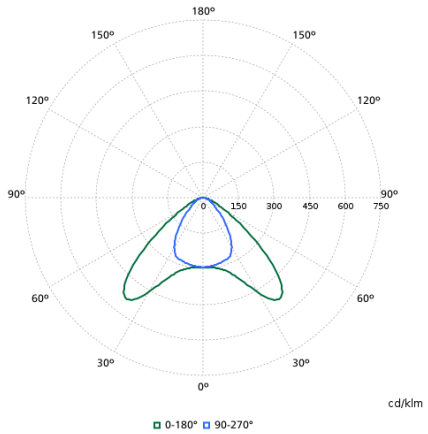

SM504T 90S/830 DIA-VLC DA35W WH
910505102567

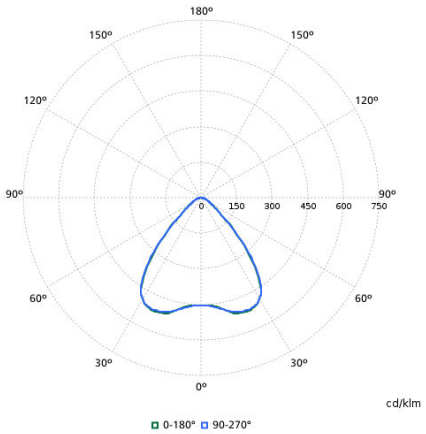

SM504T 80S/840 DIA-VLC WB WH
910505104965

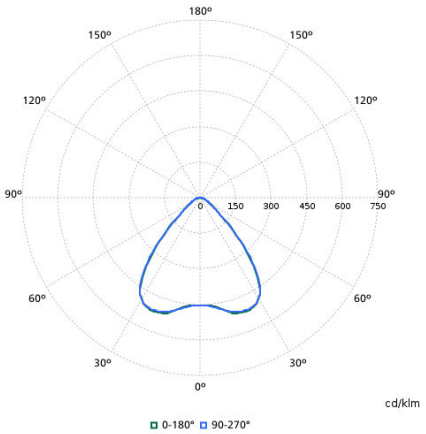

SM504T 61S/840 PSU WB WH
910505104962

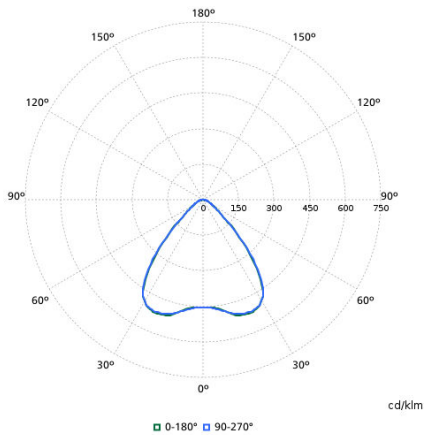

SM504T 61S/840 PSU WB BK
910505104963

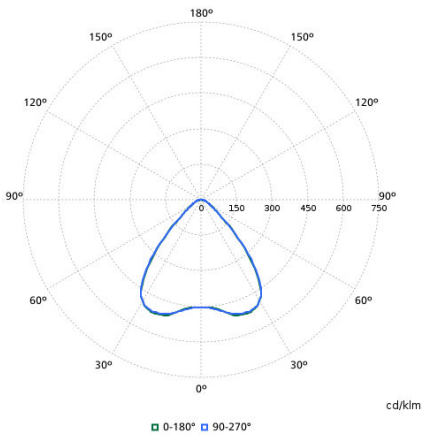

SM504T 80S/840 DIA-VLC WB BK
910505104964

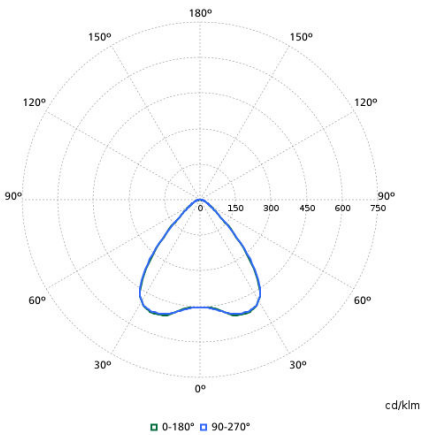

SM504T 61S/830 PSU WB BK
910505104961

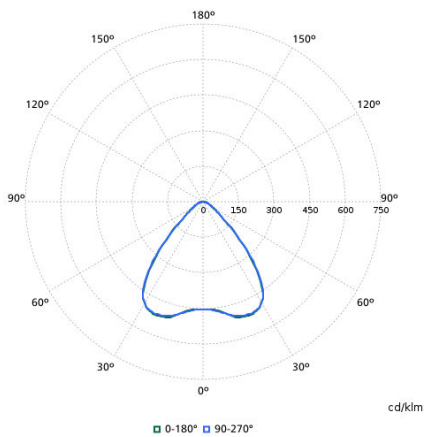

SM504T 80S/830 DIA-VLC WB WH
910505104971

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.