PHILIPS

MASTER MHN-SA

DMHNSA



Product Description

Compact quartz metal halide lamps with double-pinch

Benefits

- Allows compact and very efficient luminaire systems with high precision optics for good beam control and minimal spill light
- Very good color rendering creates a pleasant ambience with high visual comfort for players and spectators
- Continuous spectral distribution offers a superior solution for (semi-) professional stadiums with regular TV coverage
- Natural white color appearance, high color rendering and good color stability
- Daylight color temperature eases transition from daylight to artificial lighting

Applications

- Professional sports lighting and floodlighting
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Features

- Very compact source (Short Arc) with high luminous efficacy and superior color rendering
- Double-pinch concept results in long lifetime

Versions



LPPR MHN-SA X830R



LPPR MHN-SA 0001

Dimensional drawing

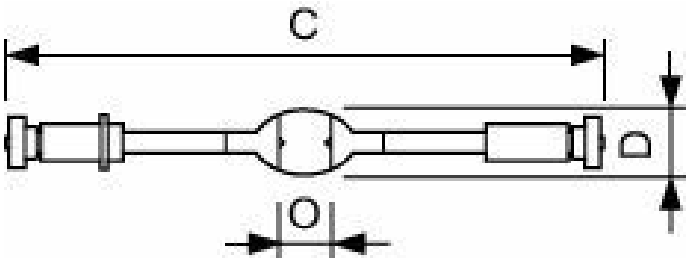

Product	D (max)	O	C (max)
MASTER MHN-SA 1800W/956 (P)SFC 230V	41 mm	25 mm	364 mm
MASTER MHN-SA 1800W/956 (P)SFC 400V	41 mm	25 mm	364 mm

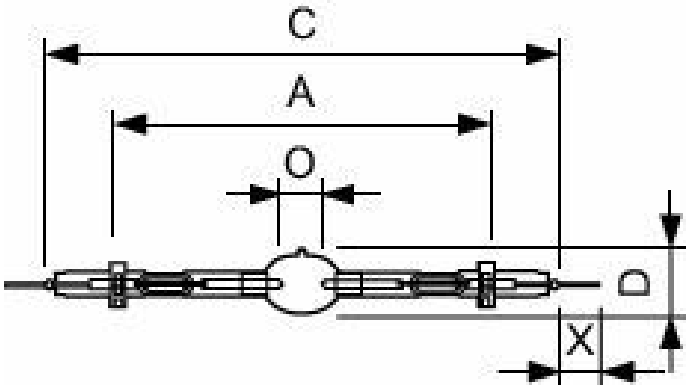

Product	D (max)	O	X	A	C (max)
MASTER MHN-SA 1800W/956 230V XW UNP/1	41 mm	25 mm	25 mm	318 mm	369 mm
MASTER MHN-SA 2000W/956 400V XW HO UNP/1	41 mm	25 mm	34 mm	226 mm	369 mm
MASTER MHN-SA 2000W/956 400V XW UNP/1	41 mm	25 mm	25 mm	226 mm	369 mm

General Information

Operating Position	P15 [Parallel +/-15D or Horizontal(HOR)]

Light Technical

Color Designation	Daylight
Chromaticity Coordinate X (Nom)	330
Correlated Color Temperature (Nom)	5600 K

Controls and Dimming

Dimmable	No

Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	TD40

General Information

Order Code	Full Product Name	Cap-Base
928099105129	MASTER MHN-SA 2000W/956 400V XW UNP/1	X830R
928099205130	MASTER MHN-SA 1800W/956 230V XW UNP/1	X830R
928195105129	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	X830R
928078415130	MASTER MHN-SA 1800W/956 (P)SFC 230V	(P)SFC
928079315130	MASTER MHN-SA 1800W/956 (P)SFC 400V	(P)SFC

Light Technical

Order Code	Full Product Name	Chromaticity Coordinate Y (Nom)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)
928099105129	MASTER MHN-SA 2000W/956 400V XW UNP/1	362	95 lm/W	85
928099205130	MASTER MHN-SA 1800W/956 230V XW UNP/1	339	86 lm/W	86
928195105129	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	366	108 lm/W	81
928078415130	MASTER MHN-SA 1800W/956 (P)SFC 230V	339	83 lm/W	86
928079315130	MASTER MHN-SA 1800W/956 (P)SFC 400V	339	84 lm/W	86

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Voltage (Nom)
928099105129	MASTER MHN-SA 2000W/956 400V XW UNP/1	2,100 W	205 V
928099205130	MASTER MHN-SA 1800W/956 230V XW UNP/1	1,800.0 W	120 V
928195105129	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	2,100 W	205 V
928078415130	MASTER MHN-SA 1800W/956 (P)SFC 230V	1,800.0 W	120 V
928079315130	MASTER MHN-SA 1800W/956 (P)SFC 400V	1,900 W	205 V

Approval and Application

Order Code	Full Product Name	Mercury (Hg) Content (Nom)	Energy Consumption kWh/1000 h
928099105129	MASTER MHN-SA 2000W/956 400V XW UNP/1	215 mg	2,244 kWh
928099205130	MASTER MHN-SA 1800W/956 230V XW UNP/1	87 mg	1,980 kWh
928195105129	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	215 mg	2,305 kWh
928078415130	MASTER MHN-SA 1800W/956 (P)SFC 230V	87 mg	1,980 kWh
928079315130	MASTER MHN-SA 1800W/956 (P)SFC 400V	234 mg	2,035 kWh

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.