PHILIPS

PL-T Triple 4-Pin Base

CNI_T4



Low mercury, energy savings.

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes,configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Benefits

- Extend your relamp cycles and reduce your maintenance costs with 12,000 hours rated average life (3 hrs per start) and 20,000 hours rated average life (12 hrs per start).
- Better for the environment - only 1.4 mg of mercury per lamp.
- More design flexibility - 25% shorter than PL-C lamps.

Applications

- Ideal for downlights in offices, hotels and retail environments

Features

- Temperature-independent lamp
- Extended relamping cycles
- Dimmable for application flexibility and energy savings
- More design flexibility

- Better for the environment
- Available in 18,26,32,42, and 57 watts with 2700,3000,3500,and 4100 color temperatures

Versions



LPPR PLTTOP4P 32W



LPPR PLTTOP4P 42W



LPPR PLTTOP4P 57W



LPPR PLTTOP4P 18W



LPPR PLTTOP4P 26W

Dimensional drawing

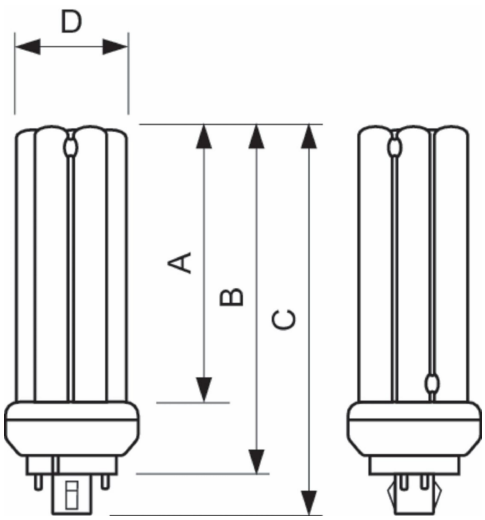

Product	D (max)	A (max)	B (max)	C (max)
PL-T 18W/835/A/4P 1CT/5X10BOX ALTO	41 mm	71.7 mm	96.0 mm	111.7 mm

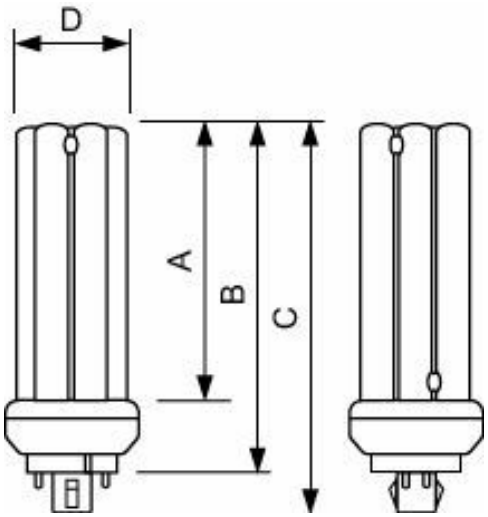

Product	D (max)	A (max)	B (max)	C (max)
PL-T 26W/827/A/4P 1CT/5X10BOX ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm
PL-T 26W/830/A/4P 1CT/5X10BOX ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm
PL-T 26W/835/A/4P 1CT/5X10BOX ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm
PL-T 26W/841/A/4P 1CT/5X10BOX ALTO	41 mm	86.7 mm	111.0 mm	126.7 mm
PL-T 32W/830/A/4P 1CT/5X10BOX ALTO	41 mm	98.7 mm	123.0 mm	138.7 mm
PL-T 32W/835/A/4P 1CT/5X10BOX ALTO	41 mm	98.7 mm	123.0 mm	138.7 mm
PL-T 32W/841/A/4P 1CT/5X10BOX ALTO	41 mm	98.7 mm	123.0 mm	138.7 mm

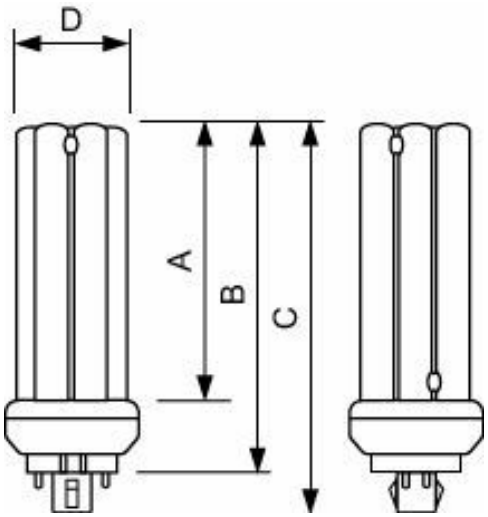

Product	D (max)	A (max)	B (max)	C (max)
PL-T 42W/830/A/4P 1CT/5X10BOX ALTO	41 mm	120.7 mm	145.0 mm	160.7 mm
PL-T 42W/835/A/4P 1CT/5X10BOX ALTO	41 mm	120.7 mm	145.0 mm	160.7 mm
PL-T 42W/841/A/4P 1CT/5X10BOX ALTO	41 mm	120.7 mm	145.0 mm	160.7 mm

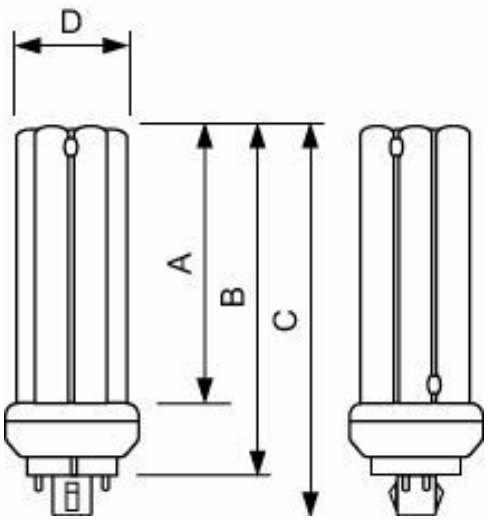

Product	D (max)	A (max)	B (max)	C (max)
PL-T 57W/835/A/4P 1CT/5X10BOX ALTO	41 mm	157.7 mm	182.0 mm	197.7 mm
PL-T 57W/841/A/4P 1CT/5X10BOX ALTO	41 mm	157.7 mm	182.0 mm	197.7 mm

Controls and Dimming

Dimmable	Yes

Approval and Application

Mercury (Hg) Content (Nom)	1.4 mg

General Information

Order Code	Full Product Name	Cap-Base
927911083050	PL-T 32W/830/A/4P 1CT/5X10BOX ALTO	GX24q-3
927911083550	PL-T 32W/835/A/4P 1CT/5X10BOX ALTO	GX24q-3
927911084150	PL-T 32W/841/A/4P 1CT/5X10BOX ALTO	GX24q-3
927911483020	PL-T 42W/830/A/4P 1CT/5X10BOX ALTO	GX24q-4
927911483520	PL-T 42W/835/A/4P 1CT/5X10BOX ALTO	GX24q-4
927911484120	PL-T 42W/841/A/4P 1CT/5X10BOX ALTO	GX24q-4
927914083520	PL-T 57W/835/A/4P 1CT/5X10BOX ALTO	GX24q-5
927914084020	PL-T 57W/841/A/4P 1CT/5X10BOX ALTO	GX24q-5
927910583550	PL-T 18W/835/A/4P 1CT/5X10BOX ALTO	GX24q-2
927910982750	PL-T 26W/827/A/4P 1CT/5X10BOX ALTO	GX24q-3
927910983050	PL-T 26W/830/A/4P 1CT/5X10BOX ALTO	GX24q-3
927910983550	PL-T 26W/835/A/4P 1CT/5X10BOX ALTO	GX24q-3
927910984150	PL-T 26W/841/A/4P 1CT/5X10BOX ALTO	GX24q-3

Light Technical

Order Code	Full Product Name	Luminous Flux	Color Designation	Correlated Color Temperature (Nom)	Luminous Efficacy (Rated) (Min)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)
927911083050	PL-T 32W/830/A/4P 1CT/5X10BOX ALTO	2,250 lm	Warm White (WW)	3000 K	-	68.2 lm/W	>80
927911083550	PL-T 32W/835/A/4P 1CT/5X10BOX ALTO	2,250 lm	White (WH)	3500 K	-	68.2 lm/W	82
927911084150	PL-T 32W/841/A/4P 1CT/5X10BOX ALTO	2,250 lm	Cool White (CW)	4100 K	-	68.2 lm/W	80
927911483020	PL-T 42W/830/A/4P 1CT/5X10BOX ALTO	3,200 lm	Warm White (WW)	3000 K	80 lm/W	-	>80
927911483520	PL-T 42W/835/A/4P 1CT/5X10BOX ALTO	3,200 lm	White (WH)	3500 K	80 lm/W	-	82
927911484120	PL-T 42W/841/A/4P 1CT/5X10BOX ALTO	3,200 lm	Cool White (CW)	4100 K	80 lm/W	-	82
927914083520	PL-T 57W/835/A/4P 1CT/5X10BOX ALTO	4,300 lm	White (WH)	3500 K	76 lm/W	-	82
927914084020	PL-T 57W/841/A/4P 1CT/5X10BOX ALTO	4,300 lm	Cool White (CW)	4100 K	76 lm/W	-	82
927910583550	PL-T 18W/835/A/4P 1CT/5X10BOX ALTO	1,175 lm	White (WH)	3500 K	-	65.3 lm/W	82
927910982750	PL-T 26W/827/A/4P 1CT/5X10BOX ALTO	1,750 lm	Incandescent White	2700 K	-	64.8 lm/W	82
927910983050	PL-T 26W/830/A/4P 1CT/5X10BOX ALTO	1,750 lm	Warm White (WW)	3000 K	-	64.8 lm/W	>80

Order Code	Full Product Name	Luminous Flux	Color Designation	Correlated Color Temperature (Nom)	Luminous Efficacy (Rated) (Min)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)
927910983550	PL-T 26W/835/A/4P 1CT/5X10BOX ALTO	1,750 lm	White (WH)	3500 K	-	64.8 lm/W	82
927910984150	PL-T 26W/841/A/4P 1CT/5X10BOX ALTO	1,750 lm	Cool White (CW)	4100 K	-	64.8 lm/W	80

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Lamp Current (Nom)
927911083050	PL-T 32W/830/A/4P 1CT/5X10BOX ALTO	33.0 W	0.320 A
927911083550	PL-T 32W/835/A/4P 1CT/5X10BOX ALTO	33.0 W	0.320 A
927911084150	PL-T 32W/841/A/4P 1CT/5X10BOX ALTO	32 W	0.320 A
927911483020	PL-T 42W/830/A/4P 1CT/5X10BOX ALTO	38.0 W	0.320 A
927911483520	PL-T 42W/835/A/4P 1CT/5X10BOX ALTO	38.0 W	0.320 A
927911484120	PL-T 42W/841/A/4P 1CT/5X10BOX ALTO	38.0 W	0.320 A
927914083520	PL-T 57W/835/A/4P 1CT/5X10BOX ALTO	51.0 W	0.320 A
927914084020	PL-T 57W/841/A/4P 1CT/5X10BOX ALTO	51.0 W	0.320 A
927910583550	PL-T 18W/835/A/4P 1CT/5X10BOX ALTO	18.0 W	0.225 A
927910982750	PL-T 26W/827/A/4P 1CT/5X10BOX ALTO	27.0 W	0.335 A
927910983050	PL-T 26W/830/A/4P 1CT/5X10BOX ALTO	26 W	0.335 A
927910983550	PL-T 26W/835/A/4P 1CT/5X10BOX ALTO	27.0 W	0.335 A
927910984150	PL-T 26W/841/A/4P 1CT/5X10BOX ALTO	27.0 W	0.335 A

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.